

Makita[®]

CONCRETE AND METAL STRUCTURE

CONSTRUCTION TOOLS

Product Range

2026/27





LAYING THE FOUNDATION



CONCRETE MODIFICATION



STRUCTURE
WALL
ROOF
WINDOW



METAL
ALUMINIUM
SANDWICH
PANELS
BRICKS
PIPES

REBAR AND MESH



REBAR TYING TOOLS 6



STEEL ROD CUTTERS 8

FRAMEWORK



ROTARY LASER 10



CIRCULAR SAWS 10

FOUNDATION



ANGLE GRINDER 8



CONCRETE VIBRATOR 9



SCREED 9



MIXER 9

CUTTING AND GRINDING CONCRETE



POWER CUTTERS 12



ANGLE GRINDERS 13

DRILLING IN CONCRETE



ROTARY HAMMERS 16



COMBINATION HAMMERS 16

DEMOLITION



DEMOLITION HAMMERS 14

DUST EXTRACTION



VACUUM CLEANERS 15

DRILLING AND CHANNELING



DUST BLOWER 17



DIAMOND CORE WET DRILLS 19



WALL CHASERS 19

FIXING AND DRILLING



IMPACT WRENCHES 20



IMPACT DRIVERS 21



ANGLE IMPACT WRENCH 22



RIVET GUN 22



DRIVER DRILLS 22

METALWORKING



HOLE PUNCHER 23



FLAT-HEAD ANGLE GRINDER 23



DIE GRINDER 23



MAGNETIC DRILLS 27

CUTTING METAL



METAL CUTTER 24



NIBBLER 24

CUTTING METAL AND BRICK



RECIPRO SAWS 28



JIG SAW 28

CUTTING METAL



METAL SHEAR 24



BAND SAWS 24



CIRCULAR SAWS 25

STAPLING



STAPLER 28

CUTTING ALUMINIUM



MITRE SAWS 29

SEALING



CAULKING GUN 29

OTHER WORK



VACUUM SWEEPER 30



MULTI FUNCTION POWER HEAD 30



EARTH AUGER 30



BLOWERS 31



TRANSPORT TROLLEYS 32



GREASE GUN 32



MAKTRAK TOOL CASES 33



ACCESSORIES 34

MODEL COMPARISON



COMPARISON ROTARY HAMMERS 18


COMPARISON VACUUM CLEANERS 18

COMPARISON IMPACT WRENCHES 23

COMPARISON IMPACT DRIVERS 23

COMPARISON ANGLE GRINDERS 25

40V MAX XGT®
BATTERIES AND
CHARGERS

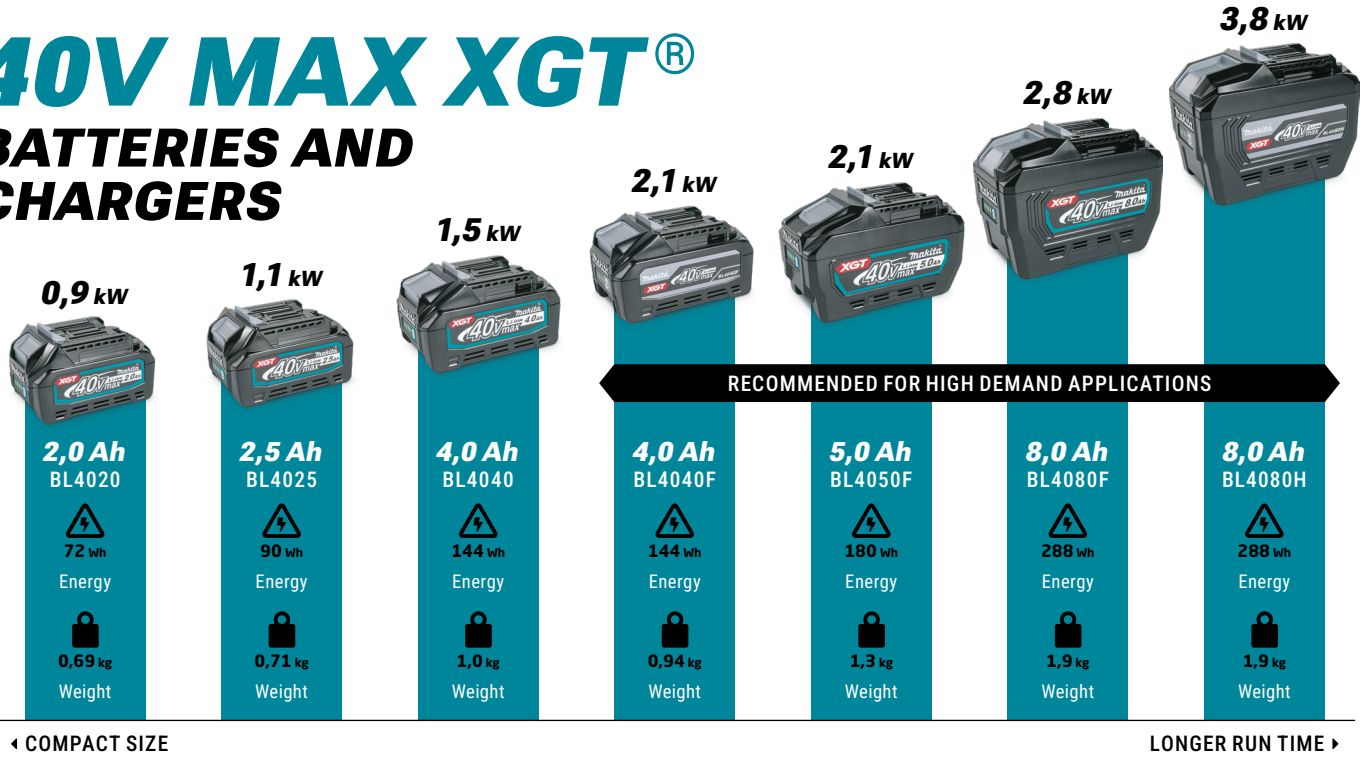

DC40RA
40 V MAX XGT® RAPID CHARGER

6-12 A Charging current, 250 W Power, Rapid charging, 2x Cooling fan

Charging times for one battery	
BL4020 / 2,0 Ah	22 min
BL4025 / 2,5 Ah	28 min
BL4040 or BL4040F / 4,0 Ah	45 min
BL4050F / 5,0 Ah	50 min
BL4080F or BL4080H / 8,0 Ah	76 min

DC40RB
40 V MAX XGT® DUAL RAPID CHARGER

6-12 A Charging current, 250 W Power, Rapid charging, 3x Cooling fan

Charging times for two batteries	
BL4020 / 2,0 Ah	22 min
BL4025 / 2,5 Ah	28 min
BL4040 or BL4040F / 4,0 Ah	45 min
BL4050F / 5,0 Ah	50 min
BL4080F or BL4080H / 8,0 Ah	76 min

DC40RC
40 V MAX XGT® CHARGER

4 A Charging current, 170 W Power, Charging, 1x Cooling fan

Charging times for one battery	
BL4020 / 2,0 Ah	30 min
BL4025 / 2,5 Ah	38 min
BL4040 or BL4040F / 4,0 Ah	67 min
BL4050F / 5,0 Ah	85 min
BL4080F or BL4080H / 8,0 Ah	170 min


DC40WA
40 V MAX XGT® DUAL CHARGER

1.1 A Charging current, 79.2 W Power, Charging

Charging times for two batteries	
BL4020 / 2,0 Ah	110 min
BL4025 / 2,5 Ah	130 min
BL4040 or BL4040F / 4,0 Ah	210 min
BL4050F / 5,0 Ah	260 min
BL4080F or BL4080H / 8,0 Ah	420 min

ADP10 Adapter: enables the charging of LXT batteries

18 V LXT®
BATTERIES AND
CHARGERS

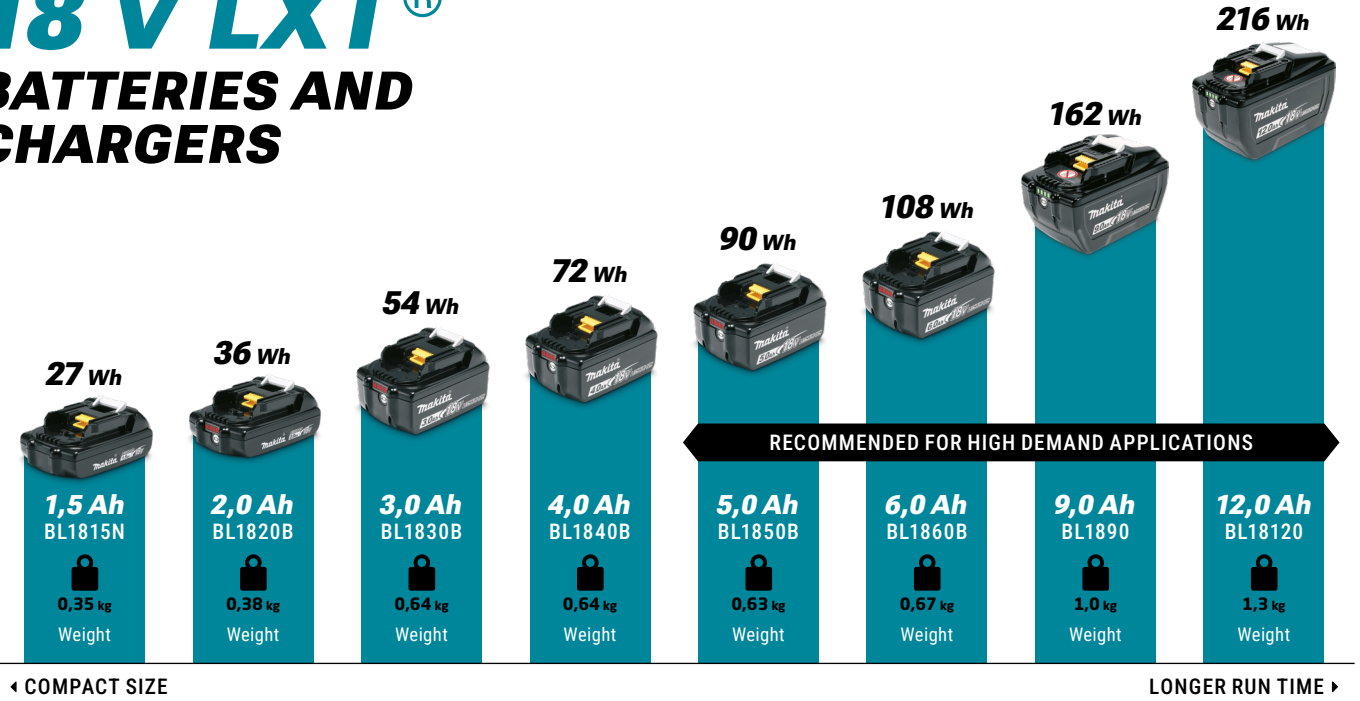

DC18RC
18 V LXT® RAPID CHARGER

9 A Charging current, 190 W Power, Rapid charging, 1x Cooling fan

Charging times for one battery	
BL1815N / 1,5 Ah	15 min
BL1820B / 2,0 Ah	24 min
BL1830B / 3,0 Ah	22 min
BL1840B / 4,0 Ah	36 min
BL1850B / 5,0 Ah	45 min
BL1860B / 6,0 Ah	55 min
BL1890 / 9,0 Ah	85 min
BL18120 / 12,0 Ah	120 min

DC18RD
18 V LXT® DUAL RAPID CHARGER

9 A Charging current, 190 W Power, Rapid charging, 2x Cooling fan

Charging times for two batteries	
BL1815N / 1,5 Ah	15 min
BL1820B / 2,0 Ah	24 min
BL1830B / 3,0 Ah	22 min
BL1840B / 4,0 Ah	36 min
BL1850B / 5,0 Ah	45 min
BL1860B / 6,0 Ah	55 min
BL1890 / 9,0 Ah	85 min
BL18120 / 12,0 Ah	120 min

PDC1200A01
PORTABLE POWER PACK

33.5 Ah Capacity, 1.206 Wh Power, 1.1 m Cable length, 10.4 kg Weight

6x greater capacity than 2x 6,0 Ah 18 V LXT batteries

Charging time (charger 191L00-4) 360 min

PDC1500A01
PORTABLE POWER PACK

43.5 Ah Capacity, 1.567 Wh Power, 1.1 m Cable length, 12.9 kg Weight

Up to 30% greater capacity than PDC1200

Charging time (charger 191L00-4) 450 min

BCC01

BATTERY CHARGING STATION

- 8x Charging batteries
- 1.6/2.1 A Charging capacity
- 350 W Consumption
- 2 m Cable length
- IPX4 Water resistant

Allows charging of up to 8x XGT batteries or *LXT batteries using the ADP10 adapter

Four batteries charge simultaneously; once one battery is fully charged, the next in sequence starts automatically



BAC01

POWER CONVERTER

BAC01 is a voltage converter that, when connected to a portable power pack (PDC01 / PDC1200 / PDC1500), serves as an ideal alternative to small petrol generators, allowing a wide range of electrical devices to be powered:

Sensitive electronic devices (laptops, tablets, mobile phones, radios, etc.)

Chargers for charging batteries

Kettles, fans, electric blankets, etc.

230 V AC outlet, 5 V / 2.4 A USB type A, 30 W USB type C, DC 12 V Auxiliary socket

PDC1200 / PDC1500 output power 1.400 W

PDC01 output power 750 W

**180%
HIGHER
TYING STRENGTH**

**BL**

40 V MAX XGT® REBAR TYING TOOL



Maximum tying capacity of (2x D16) x (2x D16)
rebar; minimum tying capacity of D10 x D10 rebar
or wire mesh x wire mesh

Dual BL Motors for twisting and feeding ensure stable tying with 1.6 mm wire

Equipped with a tightening mechanism for 180% higher tying strength compared to our 18 V models

TR001GZ / without batteries and charger

BENEFITS

**4x
FASTER**



**LOWER
COST**

*COMPARED TO MANUAL TYING

*COMPARED TO MANUAL TYING

WIRE TIGHTENING

Equipped with a wire tightening mechanism, the tool holds one end in place and pulls back on the opposite for 180% stronger ties compared to LXT models. Ideal for tying vertical structures.

STAYING ON SCHEDULE

Using a rebar tying tool significantly reduces worker fatigue by automating the repetitive motion of manual tying. This leads to improved efficiency, making projects easier to manage and more likely to stay on schedule.

VERSATILITY


Thanks to the larger jaw capacity, the tool can be used for effective hose management. Hoses can be tied to rebar structures for better organisation.

EASY TO LEARN & USE



Rebar tying tools are easy to use and quick to learn, even for workers with no prior experience. They require minimal training and ensure consistent tying quality, boosting efficiency and overall productivity on the job site.

× 2							× 3							× 4				
TR001G	x	D10	D13	D16	D19	D22	D25	x	D10×2	D13×2	D16×2	D19×2	D22×2	D25×2	x	D10×2	D13×2	D16×2
	D10	✓						D10	✓	✓		✓	✓	✓	D10×2	✓		
	D13	✓	✓					D13	✓	✓	✓	✓	✓		D13×2	✓	✓	
	D16	✓		✓				D16	✓		✓	✓			D16×2	✓		✓
	D19	✓	✓	✓	✓			D19	✓	✓	✓	✓			D19×2			✓
	D22	✓	✓	✓	✓	✓		D22	✓	✓	✓	✓			D22×2			
	D25	✓	✓	✓	✓	✓	✓	D25	✓	✓	✓	✓			D25×2			
	D29	✓	✓	✓	✓	✓	✓	D29	✓	✓	✓				D29×2			
	D32	✓	✓	✓	✓	✓		D32	✓	✓	✓				D32×2			
	D35	✓	✓	✓	✓			D35							D35×2			

1915N0-0
ANNEALED TIE WIRE,
Ø1,6 MM, 30 M, 32 REELS
TR001G




1915N6-8
EXTENSION HANDLE,
62,5-80 CM
DTR180, DTR181,
TR001G

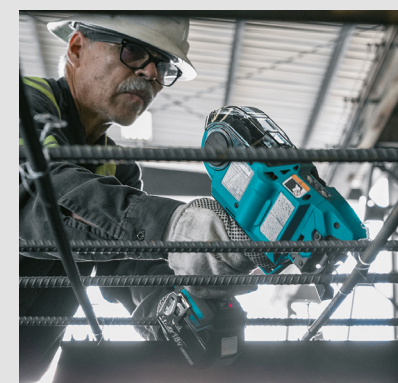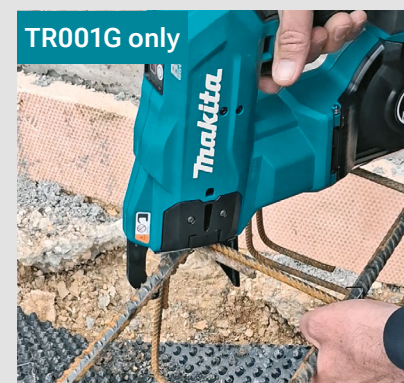


x2								x3								x4			
	x	D10	D13	D16	D19	D22	D25	x	D10x2	D13x2	D16x2	D19x2	D22x2	D25x2	x	D10x2	D13x2	D16x2	
DTR180	D10	✓	✓	✓				D10	✓	✓					D10x2	✓	✓		
	D13	✓	✓	✓				D13	✓	✓					D13x2	✓	✓		
	D16	✓	✓	✓				D16	✓						D16x2				
DTR181	x	D10	D13	D16	D19	D22	D25	x	D10x2	D13x2	D16x2	D19x2	D22x2	D25x2	x	D10x2	D13x2	D16x2	
	D10							D10		✓	✓				D10x2	✓	✓		
	D13					✓	✓	D13		✓	✓				D13x2	✓	✓		
	D16			✓	✓	✓	✓	D16	✓		✓	✓			D16x2	✓	✓	✓	
	D19	✓	✓	✓	✓	✓	✓	D19	✓	✓	✓				D19x2				
	D22	✓	✓	✓	✓	✓	✓	D22	✓	✓	✓				D22x2				
	D25	✓	✓	✓	✓	✓		D25	✓	✓	✓				D25x2				
	D29	✓	✓		✓			D29							D29x2				
	D32		✓	✓				D32							D32x2				
	D35	✓						D35							D35x2				

191J59-9
POLY COATED TIE WIRE,
Ø0,8 MM, 100 M, 50 REELS
DTR180, DTR181



199137-9
TIE WIRE, Ø0,8 MM,
100 M, 50 REELS
DTR180, DTR181





XGT
SC001G
40 V MAX XGT® STEEL ROD CUTTER

- 3-16 mm Cutting capacity
- 1,7 s Cutting speed
- Rotatable head

Adjustable stopper holds the rebar at 90° to the cutting blade and assists with cutting stability
Anti-scattering protector prevents cut pieces from flying toward the operator
Spark free cutting of rebar and steel rod

SC001GZK / without batteries and charger and with plastic case



XGT
SC001G
40 V MAX XGT® STEEL ROD CUTTER

- 3-16 mm Cutting capacity
- 1,7 s Cutting speed
- Rotatable head

Adjustable stopper holds the rebar at 90° to the cutting blade and assists with cutting stability
Anti-scattering protector prevents cut pieces from flying toward the operator
Spark free cutting of rebar and steel rod

SC001GZK / without batteries and charger and with plastic case



XGT
GA038G
40 V MAX XGT® ANGLE GRINDER

- 230 mm Wheel diameter
- 1,700 W Max. output power
- 73 mm Cutting depth
- Soft start
- Electric brake

AWS® uses Bluetooth technology to automatically turn the vacuum cleaner on or off when you start or stop the tool
AFT® turns the motor off if rotation of the wheel is suddenly forced to stop

GA038GZ07 / without batteries and charger



LXT
DVR350
18 V LXT® CONCRETE VIBRATOR

- 25 mm Vibration diameter
- 800 mm Shaft length
- 13,000 min⁻¹ Vibrations per min

18 V LXT® power provides quick and effortless vibration, helping remove trapped air pockets from concrete in foundations and bases
800 mm vibrator shaft with a 25 mm diameter
Protective covers minimise contamination around the switch and battery, while the ergonomic soft-grip handle increases comfort

DVR350Z / without batteries, charger and shaft



XGT
VL001G
40 V MAX XGT® SCREED

- 11,000 min⁻¹ Vibrations per min
- Trigger lock-on
- Constant speed

Lightweight design provides excellent manoeuvrability, while constant speed control helps maintain stable vibration for efficient finishing work
Three interchangeable screed blades: 90 cm / 140 cm / 180 cm
Equipped with a lock-on button for comfortable continuous operation

VL001GZ / without batteries, charger and screed blade




E-11097
TCT SAW BLADE,
110 MM, 24T
SC002G, DSC251

DUST EXTRACTION ATTACHMENT


- Maximum cutting depth 60 mm
- Plunge feature
- Adjustable depth stops
- 360° dust port




198440-5
GA038G



198900-7
AWS WIRELESS TRANSMITTER, WUT01
GA038G



B-54025
NEBULA DIAMOND WHEEL,
REINFORCED CONCRETE, 230 MM
GA038G



D-18699
CUT-OFF WHEEL, METAL, 230MM
GA038G

FLEXIBLE SHAFTS

- Effective air bubble removal range is approximately 10x the diameter of the vibrating head

1910E1-5
Ø32 mm / 1,2 m
VR004G

1910C2-9
Ø32 mm / 2,4 m
VR004G

1910E2-3
Ø32 mm / 1,7 m
VR004G

1910C4-5
Ø38 mm / 2,4 m
VR004G

SCREED BLADES

- The blades are easy to install/remove by using a lever



1917D5-2
90 cm
VL001G



1917D4-4
140 cm
VL001G



1917D3-6
180 cm
VL001G



XGT LXT CXT

SKR001

XGT®/LXT®/CXT® ROTARY GREEN LASER

Battery connection

360° Laser lines

520 nm Green laser

30 m Plumb beam

600 min⁻¹ Rotation speed

Dual slope laser for levelling and complex grading of pipes, ramps and job sites requiring drainage in two directions
Compatible battery platforms: XGT* / LXT / CXT* (*with adapter)
Operating range of 800 m with digital receiver for long-distance applications and superior accuracy

SKR001Z / without batteries and charger and with LXT battery tray



XGT

HS012G

BL AWS

40 V MAX XGT® CIRCULAR SAW

165 mm Saw blade

50°/0° Bevel range

5.200 RPM No load speed

Electric break

Cutting capacity of 57 mm (0°), 41 mm (45°) and 37 mm (50°)
Can be used with guide rails when fitted with optional adapter 196935-0
Die-cast magnesium base, blade guard, and blade cover provide a lightweight and durable design

HS012GZ01 / without batteries and charger



XGT

HS004G

BL ADT AWS

40 V MAX XGT® CIRCULAR SAW

190 mm Saw blade

0°/48° Bevel range

6.000 RPM No load speed

Electric break

Cutting capacity of 62,5 mm (0°), 44,5 mm (45°) and 42 mm (48°)
Saw base is directly compatible with guide rails to provide precise straight or bevel cutting
Die-cast magnesium base, blade guard, and blade cover provide a lightweight and durable design

HS004GZ02 / without batteries and charger



XGT

LH001G

BL AWS

40 V MAX XGT® TABLE TOP MITRE SAW

260 mm Saw blade

45°/0° Bevel range

45°/52° Miter range

Electric break

Cutting capacity of Mite Saw: (0°) 69x130 / 93x95 mm, (45°) 69x85 / 93x67 mm
Cutting capacity of Table Saw: (0°) 40 mm
LED light casts a shadow of the saw blade onto the material as an exact cutting line

LH001GZ / without batteries and charger



XGT

UC026G

BL

40 V MAX XGT® CHAIN SAW

1,6 kW Output power

400 mm Guide bar

0,325" Pitch

1,1 mm Gauge

5,4 kg Weight BL4050F

Excellent cutting performance, fast acceleration and good responsiveness
Adjustable automatic chain lubrication with large oil reservoir
Captive bar nuts retained in sprocket cover for convenient setup and maintenance

UC026GZ / without batteries and charger
UC026GT101 / with rapid charger
DC40RA, 5,0 Ah battery BL4050F



XGT

TD004G

BL

40 V MAX XGT® IMPACT DRIVER

230 Nm Fastening torque

Assist mode

Speed settings

LED job light

Electric brake

Assist mode (T-mode) for faster tightening of self-drilling screws in thin metal; helps prevent damage to the screw or workpiece
Compact length at only 136 mm; ideal for working in tight spaces

TD004GZ01 / without batteries and charger



HIGH POWER
WITH GREAT MANOEUVRABILITY



DIRECTLY COMPATIBLE
WITH OPTIONAL GUIDE RAILS



HIGH PERFORMANCE
WITH LOW NOISE LEVELS



4-STAGE IMPACT
POWER SELECTION

LE00981913
BATTERY ADAPTER
FOR XGT BATTERIES
SKR001



P-81315
TRIPOD,
1.000-2.700 MM
SKR001

B-62985
EFFICUT TCT SAW BLADE,
WOOD, 165 MM, 25T
HS012G



B-64191
EFFICUT TCT SAW BLADE,
WOOD, 190 MM, 24T
HS004G



1913K7-3
PARALLEL GUIDE
FOR GUIDE RAILS



199826-6
QUICK-RELEASE
CLAMP
FOR GUIDE RAILS



1913K5-7
QUICK-RELEASE
CLAMP SET
FOR GUIDE RAILS



GUIDE RAILS
199140-0 1,0 m
199141-8 1,5 m
194367-7 3,0 m



E-27763
EFFICUT T.C.T. CIRCULAR
SAW BLADE, 260X30MM, 45T
LH001G



E-29549
EFFICUT T.C.T. CIRCULAR
SAW BLADE, 260X30MM
LH001G



E-29577
EFFICUT CIRCULAR SAW
BLADE 260X30MM, 80T
LH001G



NAILERS
IDEAL FOR STRENGTHENING
FRAMEWORK

DBN601 - LXT®
16GA / 19-64 mm



DBN900 - LXT®
BN001G - XGT®
30° / Ø2,9-3,3 mm
50-90 mm



NUT SETTERS
Impact PREMIER, torsion, magnetic



Part	Size	Length	Shank
E-03458	6 mm	65 mm	1/4"
E-03464	8 mm	65 mm	1/4"
E-03470	10 mm	65 mm	1/4"
E-03486	13 mm	65 mm	1/4"



XGT
CE001G BL MOTOR AFT

40+40 V MAX XGT® POWER CUTTER



ø 355 mm
Wheel



▲ 127 mm
Cutting depth



4.000 W
Output power



Wet and dry



12,2 kg
Weight BL4040F

Adjustable blade guard facilitates cutting in low or upper wall zones
AFT® turns the motor off if rotation of the wheel is suddenly forced to stop
Integrated water delivery system with water flow adjustment knob continuously feeds water less dust during concrete cutting

CE001GZ / without batteries and charger



XGT
CE002G BL MOTOR AFT AWS

40+40 V MAX XGT® POWER CUTTER



ø 355 mm
Wheel



▲ 127 mm
Cutting depth



4.000 W
Output power



Dry



13,1 kg
Weight BL4040F

Dry-cutting model engineered for use with vacuum cleaners, ideal for indoor cutting
Capable of cutting 8-10 rebars (Ø16 mm) in a single pass
Anti-vibration housing dampens vibrations from cutting
Electric brake for maximum productivity

CE002GZ01 / without batteries and charger



XGT
CE004G BL MOTOR AFT

40 V MAX XGT® POWER CUTTER



ø 305 mm
Wheel



▲ 121 mm
Cutting depth



1.700 W
Output power



Wet and dry



6,7 kg
Weight BL4040F

Adjustable blade guard facilitates cutting in low or upper wall zones
AFT® turns the motor off if rotation of the wheel is suddenly forced to stop
Lightweight at 6,7 kg and compact for better manoeuvrability

CE004GZ / without batteries and charger



XGT
CE003G BL MOTOR AFT

40 V MAX XGT® POWER CUTTER



ø 230 mm
Wheel



▲ 88 mm
Cutting depth



1.900 W
Output power



Wet and dry



6,4 kg
Weight BL4040F

Adjustable blade guard facilitates cutting in low or upper wall zones
AFT® turns the motor off if rotation of the wheel is suddenly forced to stop
Electric brake stops the wheel in 2 seconds or less allowing for faster re-positioning

CE003GZ02 / without batteries and charger



XGT
GA050G BL MOTOR AFT

40 V MAX XGT® ANGLE GRINDER



ø 125 mm
Wheel diameter



2.300 W
Output power



▲ 34 mm
Cutting depth



Soft start



Electric brake

High work efficiency thanks to high speed BL Motor with a rotation speed of 11.000 min⁻¹
AFT® turns the motor off if rotation of the wheel is suddenly forced to stop
Large paddle switch enables multiple grip positions

GA050GZ01 / without batteries and charger



XGT
GA023G BL MOTOR AFT AWS

40 V MAX XGT® ANGLE GRINDER



ø 125 mm
Wheel diameter



1.100 W
Output power



▲ 34 mm
Cutting depth



Soft start



Electric brake

Variable speed control 3.000-8.500 min⁻¹ allows the adjustment of speed to match the application
AFT® turns the motor off if rotation of the wheel is suddenly forced to stop

GA023GZ01 / without batteries and charger



WET CUTTING FOR EFFICIENT DUST CONTROL


- Enables long, accurate and clean cuts
- Efficient water delivery supports consistent water flow for dust control and blade cooling

1914H2-8
CART WITH WATER SUPPLY 13 L
CE001G



- Connects garden sprayers (US053D, DUS054, DUS108, DUS158) with power cutters to use as a water tank

1915Y2-3
POWER CUTTER WATER HOSE KIT
CE001G, CE004G, CE003G

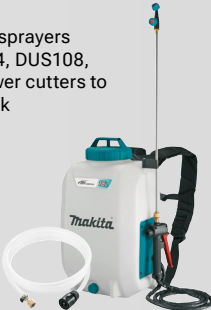

DIAMOND BLADES

Part	Diameter	Cutting	Material
E-12996	355 mm	wet/dry	concrete
B-54031	300 mm		
E-02967	230 mm		
B-55348	355 mm	dry	multi-material / rescue
B-55332	300 mm		
B-55326	230 mm		



191G06-2
DUST COLLECTION ATTACHMENT FOR DIAMOND BLADES
GA050G, GA023G



B-53992
DIAMOND BLADE, 125 MM
GA050G, GA023G




B-12778
DIAMOND BLADE, 125 MM
GA050G, GA023G



191W05-0
DUST COLLECTION ATTACHMENT FOR OFFSET DIAMOND WHEELS
GA050G, GA023G



B-38560
OFFSET DIAMOND WHEEL, 125 MM, M14
GA050G, GA023G





XGT
HM001G BL MOTOR AWS AVT-SOFT NO-LOAD
40 V MAX XGT® DEMOLITION HAMMER

- Adapted for SDS-Max
- 9,4j Impact energy
- Speed settings
- Constant speed
- 7,1 kg Weight BL4050F

Anti-Vibration Technology (AVT®) is an internal counterbalance system along with vibration-absorbing handles that work together to reduce vibration

Side handle swivels 360° for increased manoeuvrability

HM001GZ02 / without batteries and charger



XGT
HM002G BL MOTOR AWS AVT-SOFT NO-LOAD
40+40 V MAX XGT® DEMOLITION HAMMER

- Adapted for SDS-Max
- 20,9j Impact energy
- Speed settings
- Constant speed
- 13,3 kg Weight BL4050F

Side handle swivels 360° for increased manoeuvrability

Anti-Vibration Technology (AVT®) is an internal counterbalance system along with vibration-absorbing handles that work together to reduce vibration

Twin LED lights with preglow and afterglow functions

HM002GZ03 / without batteries and charger



XGT
HM004G BL MOTOR AWS AVT-SOFT NO-LOAD
40+40 V MAX XGT® DEMOLITION HAMMER

- 28,6 HEX Shank
- 72,8j Impact energy
- Constant speed
- Soft start
- 32,1 kg Weight BL4080F

AVT® and vibration-absorbing handles work together to reduce up to 30% less overall vibration

Soft start suppresses start-up reaction for improved accuracy

Twin LED lights with preglow and afterglow functions

Hammer trolley is available (optional accessory)

HM004GZ04 / without batteries and charger



XGT
VC006GM BL MOTOR AWS
40+40 V MAX XGT® VACUUM CLEANER

- 15 kPa Sealed suction
- 350 w Suction power
- 40/30 l Dry/wet capacity
- M Dust class
- Variable power

Automatic self-cleaning filter system shakes the dust off the pre-filter to maintain optimal suction and longer filter life

Plastic tank with a water drain for easier emptying
Makpac case can be attached directly to provide additional storage

VC006GMZ01 / without batteries and charger



XGT
VC009G BL MOTOR AWS HEPA Filter
40 V MAX XGT® BACKPACK VACUUM CLEANER

- 18 kPa Sealed suction
- 165 w Suction power
- 1,5 l Dry capacity
- Power settings
- 5,3 kg Weight BL4080F

Ultimate portability for overhead construction, job site obstacles, and limited space

Efficient two stage HEPA filtration system captures 99.97% of particulates 0,3 microns and larger

Padded shoulder straps and waist belt with multiple adjustments for improved fit and comfort

VC009GZ03 / without batteries and charger



XGT
VC013GL BL MOTOR AWS HEPA Filter
40 V MAX XGT® VACUUM CLEANER

- 15 kPa Sealed suction
- 165 w Suction power
- 7,4/4,5 l Dry/wet capacity
- Variable power
- 6,2 kg Weight BL4080F

Two tools in one; quickly converts from vacuum to blower for increased versatility

Filter cleaning system is designed to maintain optimum suction efficiency and longer filter life

Efficient HEPA filter captures 99.97% of particulates 0,3 microns and larger

VC013GLZ03 / without batteries and charger



SDS-MAX FOR HEAVY DUTY APPLICATIONS
POWERFUL IMPACT ENERGY



B-23064
SELF-SHARPENING
BULL POINT, 400 MM
For SDS-Max

199144-2
VACUUM ATTACHMENT
FOR HAMMER DRILLING
AND CHISELLING
HM001G, HM002G

TRANSPORT TROLLEY

- Large push handle
- Strap for securing the hammer
- Storage compartments for chisels, batteries and charger

JM00000674
HM004G



B-10372
SELF-SHARPENING
BULL POINT, 400 MM
28,6 HEX

197148-8
VACUUM ATTACHMENT
FOR HAMMER DRILLING
AND CHISELLING
HM004G

D-61547
COLD CHISEL,
28 MM, 410 MM
28,6 HEX

AUTO START WIRELESS SYSTEM

AWS® uses Bluetooth® technology for wireless power-on and power-off communication between the equipped tool and dust extractor.

AWS® is intelligent communication that eliminates cords and excessive noise since the dust extractor runs only when trigger-activated by an AWS® tool. When the trigger is released, the dust extractor powers-down. The expanding AWS system includes vacuum cleaners and tools for concrete, metal and woodworking.

198900-7
WUT01
AWS WIRELESS TRANSMITTER

191A40-6 / 199804-6
WUT02
ADAPTER FOR WIRELESS
AUTO-START OF A
CONVENTIONAL VACUUM
VIA BLUETOOTH

1915G6-9
HOSE COMPLETE
SET 28-5
VC013GL

199486-4
SHOULDER STRAP
VC013GL

1915T4-4
WET FILTER
VC013GL





XGT
HR006G BL MOTOR AWS AFT AVT+SOFT-RELOAD
40+40 V MAX XGT® ROTARY HAMMER

- Adapted for SDS-Max
- 21,4 J Impact energy
- Concrete TCT bit ø 52 mm
- Concrete Core bit ø 160 mm
- Weight 14,3 kg BL4050F

Two XGT® 40 V Max Batteries and BL Motor work together to deliver power and run time for the most demanding applications

Advanced Anti-vibration technology with a 3-component system (counterweight, damper spring and anti-vibration housing) that sets new standards in vibration reduction

HR006GZ / without batteries and charger

XGT
HR005G BL MOTOR AWS AFT AVT+SOFT-RELOAD
40 V MAX XGT® ROTARY HAMMER

- Adapted for SDS-Max
- 8,0 J Impact energy
- Concrete TCT bit ø 40 mm
- Concrete Core bit ø 105 mm
- Weight 8,2 kg BL4050F

Powerful BL Motor delivers 1.450-2.900 blows per minute and 8,0 J of impact energy to handle demanding applications

Advanced anti-vibration technology with a 3-component system (counterweight, damper spring and anti-vibration housing) that sets new standards in vibration reduction

HR005GZ01 / without batteries and charger

XGT
HR012G BL MOTOR AWS AFT AVT
40 V MAX XGT® COMBINATION HAMMER

- Adapted for SDS-Plus
- 3,3 J Impact energy
- Concrete TCT bit ø 28 mm
- Concrete Core bit ø 54 mm
- Weight 4,3 kg BL4040F

Can be equipped with DX18 attachment for excellent dust extraction and manoeuvrability especially for overhead applications

3-mode operation: rotation only, hammering with rotation or hammering only for multiple applications

HR012GZ01 / without batteries and charger

XGT
HR007G BL MOTOR AWS AFT AVT
40 V MAX XGT® COMBINATION HAMMER

- Adapted for SDS-Plus
- 3,0 J Impact energy
- Concrete TCT bit ø 28 mm
- Concrete Core bit ø 54 mm
- Weight 4,4 kg BL4040F

Can be equipped with DX15 attachment for excellent dust extraction and manoeuvrability especially for overhead applications

Active Feedback-Sensing Technology (AFT®) electronically turns off the motor if rotation of bit is suddenly forced to stop

HR007GZ / without batteries and charger

XGT
HR010G BL MOTOR AWS AVT
40 V MAX XGT® COMBINATION HAMMER

- Adapted for SDS-Plus
- 2,1 J Impact energy
- Concrete TCT bit ø 20 mm
- Concrete Core bit ø 35 mm
- Weight 3,1 kg BL4040F

Compact and lightweight design, key for overhead applications

Electric brake allows the tool to be repositioned faster for maximum productivity

3-mode operation: rotation only, hammering with rotation or hammering only for multiple applications

HR010GZ01 / without batteries and charger

XGT
AS001G BL MOTOR
40 V MAX XGT® DUST BLOWER

- 200 m/s Air speed
- 1,1 m³/min Air flow
- 2,8 N Blow force
- Variable speed
- Easy nozzle change

High-speed blower with a wide range of attachments, ideal for cleaning tools and filters and for removing concrete dust from pilot holes prepared for anchors

Filter on blower intake reduces dust being blown through the blower

LED job light with preglow and afterglow functions

AS001GZ / without batteries and charger



SDS-MAX DUST EXTRACTION

199144-2
DUST EXTRACTOR ATTACHMENT FOR CHISELLING
HR006G / HR005G



199142-6
DUST EXTRACTOR ATTACHMENT FOR DRILLING / CHISELLING
HR005G



- Universal dust extraction adapter for drilling up to a maximum drilling diameter of 52 mm.
- The adapter automatically attaches to flat surfaces – such as walls, ceilings, or floors – thanks to the vacuum cleaner's negative pressure.

1914X3-8
DUST EXTRACTOR ATTACHMENT FOR DRILLING UNIVERSAL



E-20127
CONCRETE CORE CUTTER, Ø55 MM, 990 MM
For SDS-Max



E-20111
CONCRETE CORE CUTTER, Ø55 MM, 550 MM
For SDS-Max



SDS-PLUS DUST EXTRACTION

1914M0-7
DUST EXTRACTOR ATTACHMENT FOR CHISELLING
HR012G



1917K7-7
DUST EXTRACTOR ATTACHMENT FOR CHISELLING
SDS-PLUS hammers



GBADX18
DUST COLLECTION ATTACHMENT DX18, MAX. Ø28 / 265 MM
HR012G



191X39-9
DUST COLLECTION ATTACHMENT DX15, MAX. Ø28 / 260 MM
HR007G



1911P2-6
DUST COLLECTION ATTACHMENT DX16, MAX. Ø20 / 165 MM
HR010G



191X78-9
LONG NOZZLE SET, Ø8 MM
AS001G





191X21-8
FLEXIBLE NOZZLE, Ø6 MM
AS001G



191X29-2
FILTER
AS001G



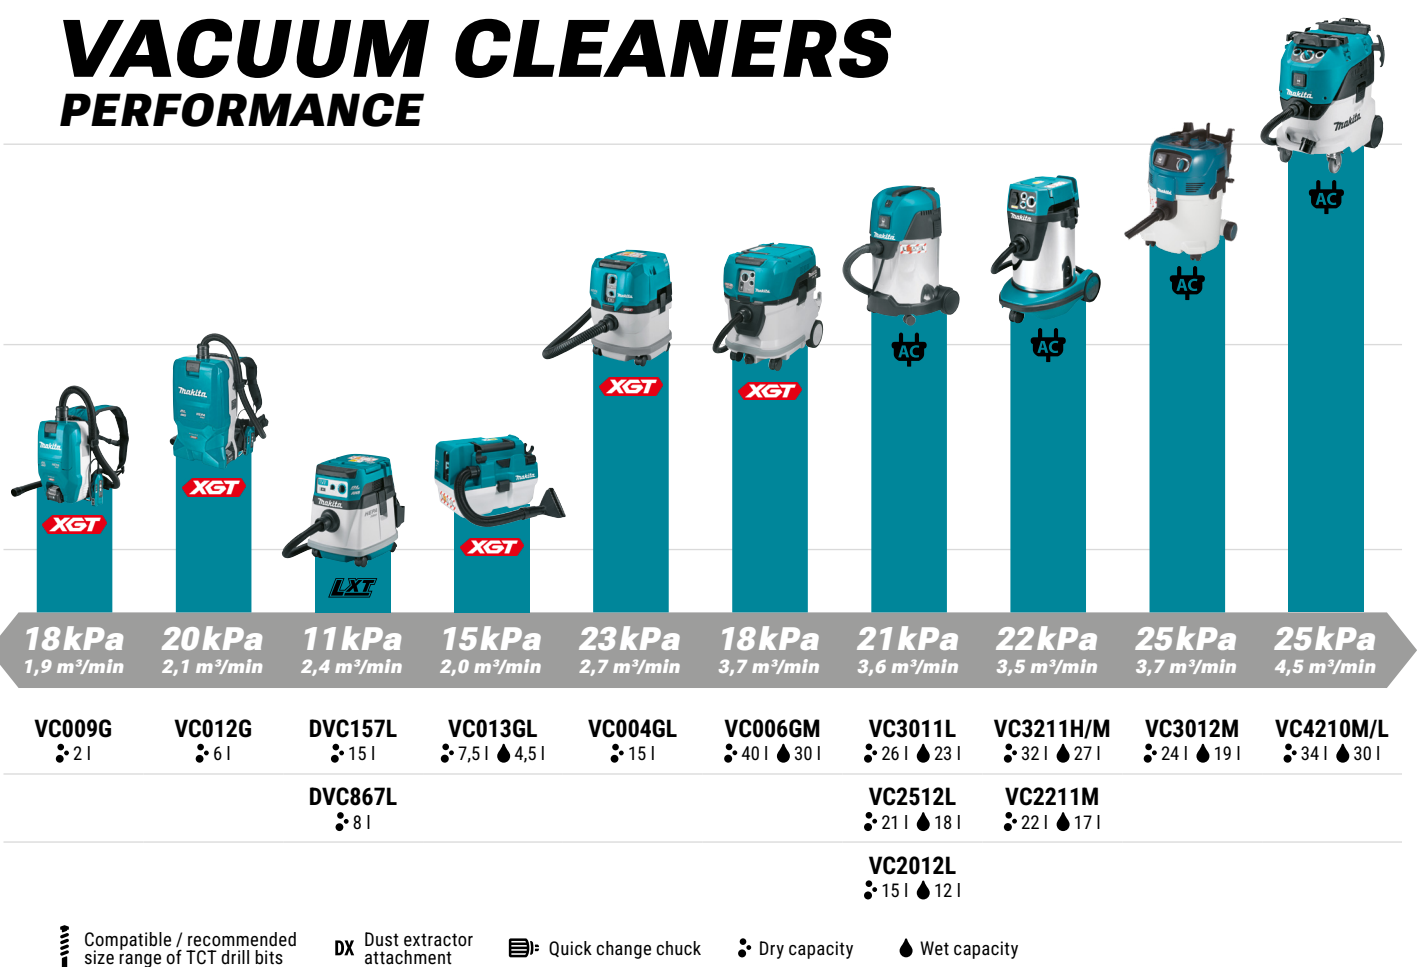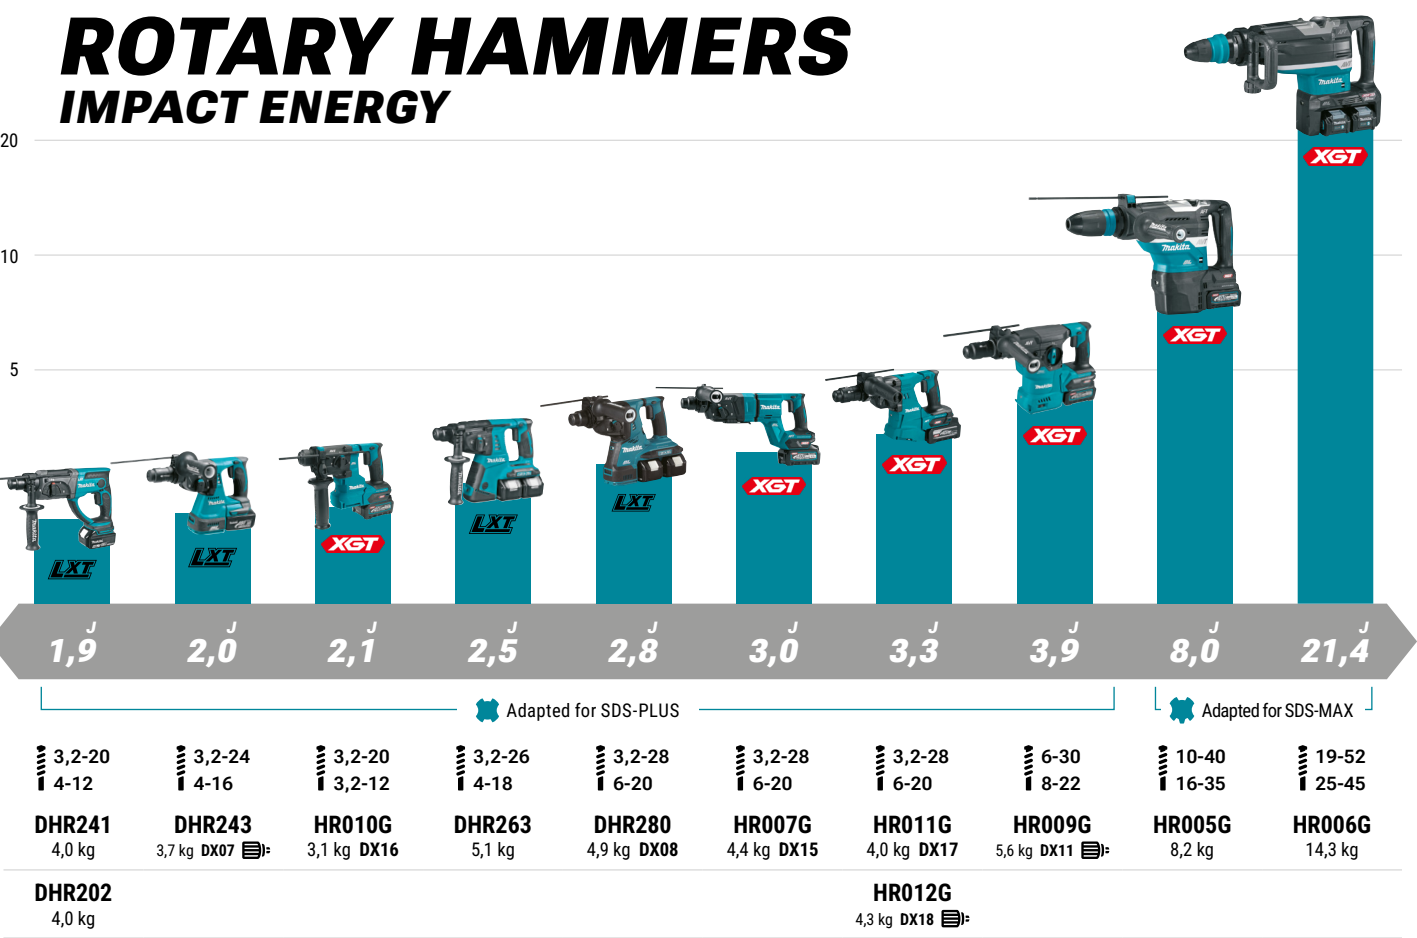

Compatible / recommended size range of TCT drill bits DX Dust extractor attachment Quick change chuck Dry capacity Wet capacity

DBM131

DIAMOND CORE WET DRILL

- M18x2,5 Spindle thread
- Variable speed
- 132 mm Concrete Diamond core bit
- Soft start
- 6,1 kg Weight

Equipped with residual current circuit breaker
Built-in (safety) slip clutch, soft start, and engine temperature monitoring

DBM131/1 / 110V with metal case

SG1251

WALL CHASER

- 125 mm Wheel diameter
- 6-30 mm Cutting width
- 0-30 mm Cutting depth
- Soft start
- Constant speed

For milling conduit and electrical trenches in stone, concrete, cement boards, sand-lime brick and plasterboard

SG1251J/1 / 110V with Makpac case
SG1251J/2 / 240V with Makpac case



P-40082

DRILL STAND FOR MAGNETIC CORE DRILL DBM131

P-40098

MOUNTING ACCESSORY FOR DRILL STAND

B-12778

Diamond blade, 125 mm SG1251



XGT
TW009G
40 V MAX XGT® IMPACT WRENCH

- 1" Shank
- 3.150 Nm Fastening torque
- 4.000 Nm Nut busting torque
- Assist mode
- Power selection

LED light ring provides 360° illumination to help eliminate shadows and illuminate a larger area
Full speed mode function reduces trigger pull to reach full speed
D-Handle with 360° positioning and angle adjustment

TW009GZ01 / without batteries and charger



XGT
TW001G
40 V MAX XGT® IMPACT WRENCH

- 3/4" Shank
- 1.800 Nm Fastening torque
- 2.050 Nm Nut busting torque
- Assist mode
- Power selection

Flexible joint isolates the battery from the grip to help reduce wear on the battery contacts
Compact length at only 213 mm; ideal for working in tight spaces
Full speed mode function reduces trigger pull to reach full speed

TW001GZ01 / without batteries and charger



XGT
TW007G
40 V MAX XGT® IMPACT WRENCH

- 1/2" Shank
- 760 Nm Fastening torque
- 1.100 Nm Nut busting torque
- Assist mode
- Power selection

Twin LED lights with preglow and afterglow functions for better illumination
Compact length at only 170 mm; ideal for working in tight spaces
Full speed mode function reduces trigger pull to reach full speed

TW007GZ01 / without batteries and charger



XGT
TW004G
40 V MAX XGT® IMPACT WRENCH

- 1/2" Shank
- 350 Nm Fastening torque
- 630 Nm Nut busting torque
- Assist mode
- Power selection

Compact length at only 144 mm; ideal for working in tight spaces
Full speed mode function reduces trigger pull to reach full speed
Twin LED lights with preglow and afterglow functions

TW004GZ01 / without batteries and charger



LXT
DTD201
18 V LXT® IMPACT DRIVER

- 210 Nm Fastening torque
- T1 assist mode
- Power selection
- LED job light

T1 assist mode for faster tightening of self-drilling screws in thin gauge metal; helps prevent damage to the screw or workpiece
Features 2 LED lights for increased job sight visibility
Compact, lightweight design at just 121 mm in length and only 1,6 kg helps reduce operator fatigue

DTD201Z / without batteries and charger



LXT
DTD173
18 V LXT® IMPACT DRIVER

- 180 Nm Fastening torque
- T1 and T2 assist modes
- Wood assist mode
- Bolt assist mode
- Power selection

T1 and T2 assist modes for faster tightening of self-drilling screws in thick or thin gauge metal
Wood assist mode for easier tightening of long screws
Bolt assist mode for preventing the loss of bolts/nuts when loosening

DTD173Z / without batteries and charger



4 SPEED SELECTION
0-600 / 0-700 / 0-850 / 0-1,200 min⁻¹



1/2" SHANK MODEL
TW002G - XGT®



COMPACT DESIGN
AND HIGH POWER



PIN DETENT
SOCKET RETENTION SHANK



RING LED LIGHT
WITH 3 BRIGHTNESS SETTINGS



IMPACT DEEP SOCKETS
High quality CR-MO construction

Part	Shank	Dimensions	Part	Shank	Dimensions	Part	Shank	Dimensions
E-24773	1"	90x46 mm - M30	E-22399	3/4"	90x36 mm - M24	134847-1	1/2"	81,5x30 mm - M20
E-22420	1"	90x41 mm - M27	E-22383	3/4"	90x30 mm - M20	E-16499	1/2"	81,5x19 mm - M12
E-24739	1"	90x36 mm - M24	E-22377	3/4"				
E-24701	1"	90x32 mm - M22	E-22355	3/4"				



EXTENSIONS
134997-2 3/4" - 150 mm
B-55712 1/2" - 150 mm



EXTENSION HANDLE

- For tightening nuts downwards without bending over
- Length adjustable in 5 stages 657-807 mm

191G67-2
TW001G, TW007G



SCREW BITS
Impact PREMIER, torsion

Part	Size	Length	Shank
E-03274	PH2	50 mm	1/4"
E-03280	PH3	50 mm	1/4"
E-03349	T20	50 mm	1/4"
E-03355	T25	50 mm	1/4"
E-03361	T30	50 mm	1/4"
E-12027	T40	50 mm	1/4"



SAFETY GEAR


Model	1	2	Model	2
DTW301		199428-8	DTD201	199428-8



BIT HOLDERS
E-20258 68 mm
E-20264 150 mm



E-25030
IMPACT BLACK 90°
ANGLE ATTACHMENT
1/4" hex shank



E-13568
5 PCS. IMPACT PREMIER
SCREW BIT SET
PH2, PZ2, PZ3, T25, T30



LXT
DTL300
18 V LXT® ANGLE IMPACT WRENCH

- 1/2" Shank
- 340 Nm Fastening torque
- 530 Nm Nut busting torque
- Assist mode
- Power selection

One forward and one reverse Auto-Stop assist modes for temporary fastening and preventing bolts/nuts from falling off during loosening
Low profile head, only 81 mm in height for reaching into tight spaces
C ring shank with hole

DTL300Z / without batteries and charger



LXT
DRV250
18 V LXT® RIVET GUN

- 6.4 mm Max. rivet diameter
- 20.000 N Pulling force
- 30 mm Stroke length
- 26 mm Head clearance
- LED job light

Capable of pulling aluminium, steel, and stainless steel rivets
Tool holds rivet in place allowing the user to operate in any orientation
30 mm stroke sets most rivets in one stroke

DRV250Z / without batteries and charger



XGT
HP003G
40 V MAX XGT® HAMMER / DRIVER DRILL

- 1.5-13 mm Chuck capacity
- 180 Nm Fastening torque
- 20 mm Capacity steel
- 50 mm Capacity wood
- 20 mm HP003G Capacity concrete

3-speed transmission provides optimal balance of speed and torque for maximum efficiency
HP003G model includes a hammer-drill mode that applies a percussive motion for drilling holes in concrete or masonry

HP003GZ01 / without batteries and charger



1/2" PIN DETENT SHANK MODEL
DTL301 - LXT®



HP003G
STEEL / WOOD CONCRETE

HOLE SAWS
EZYCHANGE




E-04070
EZYCHANGE ADAPTER WITH HSS-G CENTERING DRILL (METALS, ALUMINIUM, WOOD, PVC)
9,5 mm HEX shank




Part	Diameter	Height	Part	Diameter	Height	Part	Diameter	Height
E-03660	20 mm	44 mm	E-03822	51 mm	44 mm	E-04020	114 mm	44 mm
E-03698	25 mm	44 mm	E-03866	57 mm	44 mm	E-04042	127 mm	44 mm
E-03735	32 mm	44 mm	E-03903	68 mm	44 mm	E-04064	152 mm	44 mm
E-03779	40 mm	44 mm	E-03931	76 mm	44 mm			

IMPACT WRENCHES
MAX. FASTENING TORQUE

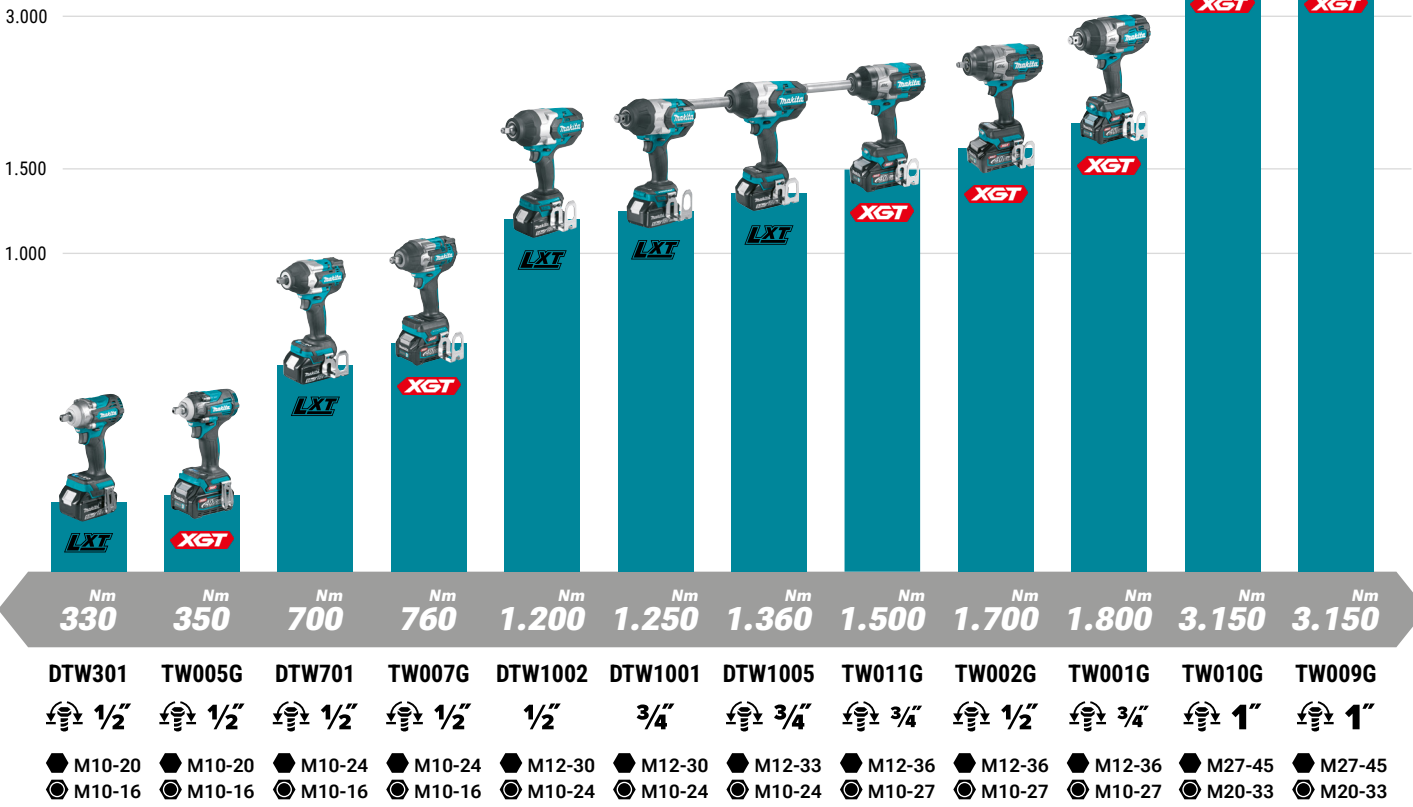

IMPACT DRIVERS
MAX. FASTENING TORQUE

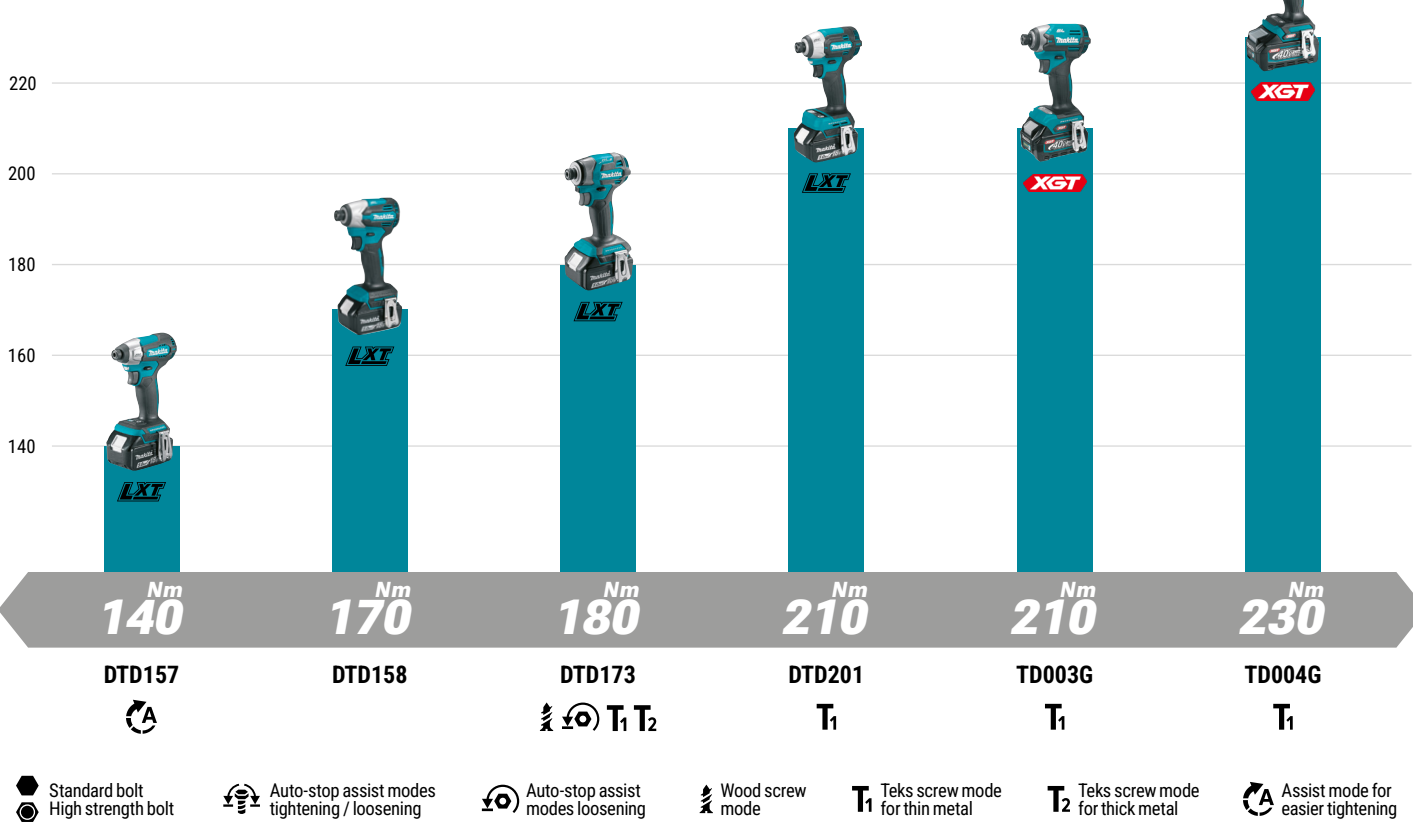



XGT
PP001G

- 40 V MAX XGT® HOLE PUNCHER
- 15x21 mm Max. oblong hole
 - 20 mm Max. round hole
 - 9 mm Capacity steel
 - 6 mm Capacity stainless steel
 - Rotatable handle

Grip handle rotates 360° allowing for optimal positioning in a variety of spaces

Adjustable depth guide allows for punch location adjustment up to 40 mm from the edge of the workpiece

PP001GZK / without batteries and charger



XGT
GA055G

- 40 V MAX XGT® FLAT-HEAD ANGLE GRINDER
- 125 mm Wheel
 - 39° Access angle
 - 2,300 W Output power
 - 9,000 RPM No load speed
 - Soft start

Efficient grinding in tight spaces with angles as small as 39°

Easy adjustment of wheel cover by lock lever

AFT® turns the motor off if rotation of the wheel is suddenly forced to stop

GA055GZ01 / without batteries and charger



XGT
GD001G

- 40 V MAX XGT® DIE GRINDER
- 6 mm Collet size
 - 29,000 RPM No load speed
 - Speed settings
 - Electric brake
 - LED job light

8 mm collet fits up to 32 mm grinding wheel points and 52 mm cut-off wheels

Spindle lock for single wrench accessory changes

AFT® turns the motor off if rotation of the wheel is suddenly forced to stop

GD001GZ01 / without batteries and charger




EFFICIENT GRINDING
IN TIGHT SPACES



3 LED LIGHTS
FOR 360° ILLUMINATION



A-80656
GRINDING WHEEL,
STAINLESS STEEL,
125 MM, WA36N
GA055G

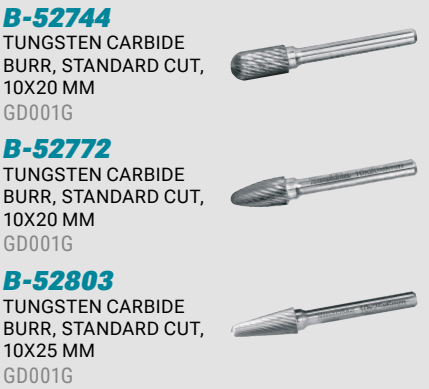

B-52744
TUNGSTEN CARBIDE
BURR, STANDARD CUT,
10X20 MM
GD001G

B-52772
TUNGSTEN CARBIDE
BURR, STANDARD CUT,
10X20 MM
GD001G

B-52803
TUNGSTEN CARBIDE
BURR, STANDARD CUT,
10X25 MM
GD001G




B-52750
TUNGSTEN CARBIDE
BURR, DIAMOND CUT,
10X20 MM
GD001G

B-52788
TUNGSTEN CARBIDE
BURR, DIAMOND CUT,
10X20 MM
GD001G

ANGLE GRINDERS

MAX OUTPUT POWER

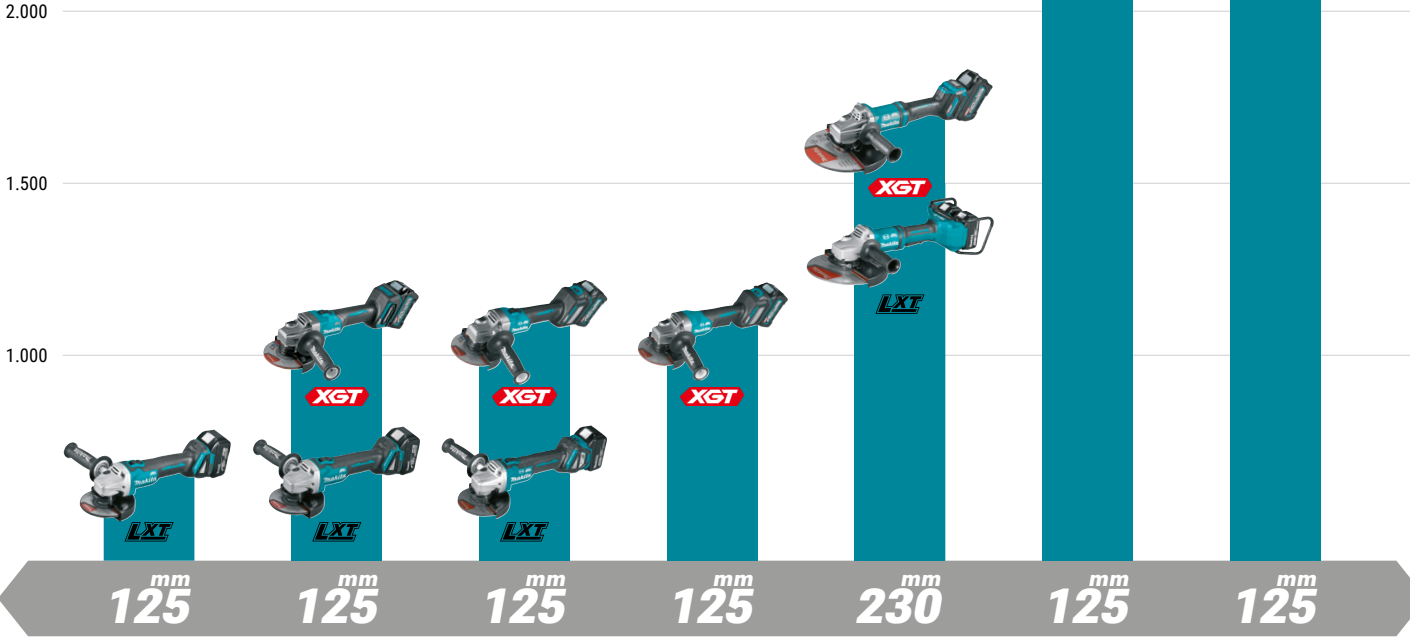

DGA504 660 W / 8.500 min ⁻¹	DGA506 660 W / 8.500 min ⁻¹	DGA513 660 W / 8.500 min ⁻¹	DGA900 1.500 W / 6.000 min ⁻¹

Slide switch Paddle switch Electric brake Variable speed



HB351

MAGNETIC DRILL

- WELDON shank
- 35 mm Capacity steel
- 50 mm Drilling depth
- Lubricated drilling
- Electro-magnet

Powerful magnetic drilling for steel and other ferrous metals

Equipped with oil supply system for smooth drilling

HB351/1 / 110V with plastic case



LXT

DJN161

18 V LXT® NIBBLER

1.900 RPM

360° Rotatable matrix

2,5 mm Aluminium
200 N/mm²

1,6 mm Steel
400 N/mm²

1,2 mm Steel
600 N/mm²

Chip disposal is below cutting material to minimize damage to cutting surface

Cutting radius: inner edge 45 mm; outer edge 50 mm

Lock-on sliding switch for continuous operation

Thickness gauge for allowable cutting thickness for steel

DJN161Z / without batteries and charger



LXT

DJS200

18 V LXT® METAL SHEAR

3.000 RPM

360° Rotatable head

2,5 mm Aluminium
200 N/mm²

2,0 mm Steel
400 N/mm²

1,6 mm Steel
600 N/mm²

High performance double cut blade design minimizes material distortion with minimal burrs

Minimum cutting radius: 178 mm

Easily cuts through spiral duct seams

DJS200Z / without batteries and charger



XGT

CS002G

40 V MAX XGT® METAL CUTTER

185 mm Saw blade

3.500 RPM No load speed

Chip collector

Electric break

LED job light

Large 67 mm cutting capacity in various metal materials including pipe, stud, channel, strut, conduit, angle, square tubing and sheet metal

On-board hex wrench for convenience

LED light with preglow and afterglow functions

CS002GZ01 / without batteries and charger



XGT

HS013G

40 V MAX XGT® CIRCULAR SAW

415 mm Saw blade

160 mm Cutting depth

0°/45° Bevel range

2.100 RPM No load speed

Electric break

Cuts 160 mm (0°) and 106 mm (45°) in a single pass

Blade stabilizer for stable blade rotation and superior cutting performance

Soft start suppresses start-up reaction for improved accuracy

HS013GZ / without batteries and charger



XGT

HS011G

40 V MAX XGT® CIRCULAR SAW

270 mm Saw blade

101 mm Cutting depth

1°/60° Bevel range

3.500 RPM No load speed

Electric break

Cutting capacity of 101 mm (0°), 71 mm (45°) and 51 mm (60°)

Saw base is directly compatible with guide rails to provide precise straight or bevel cutting

Constant speed control minimizes reduction in rotation speed under load

HS011GZ / without batteries and charger



XGT

HS009G

40 V MAX XGT® CIRCULAR SAW

235 mm Saw blade

85 mm Cutting depth

1°/60° Bevel range

4.000 RPM No load speed


Electric break

Cutting capacity of 85 mm (0°), 61 mm (45°) and 44 mm (60°)

Saw base is directly compatible with guide rails to provide precise straight or bevel cutting

Constant speed control minimizes reduction in rotation speed under load

HS009GZ / without batteries and charger

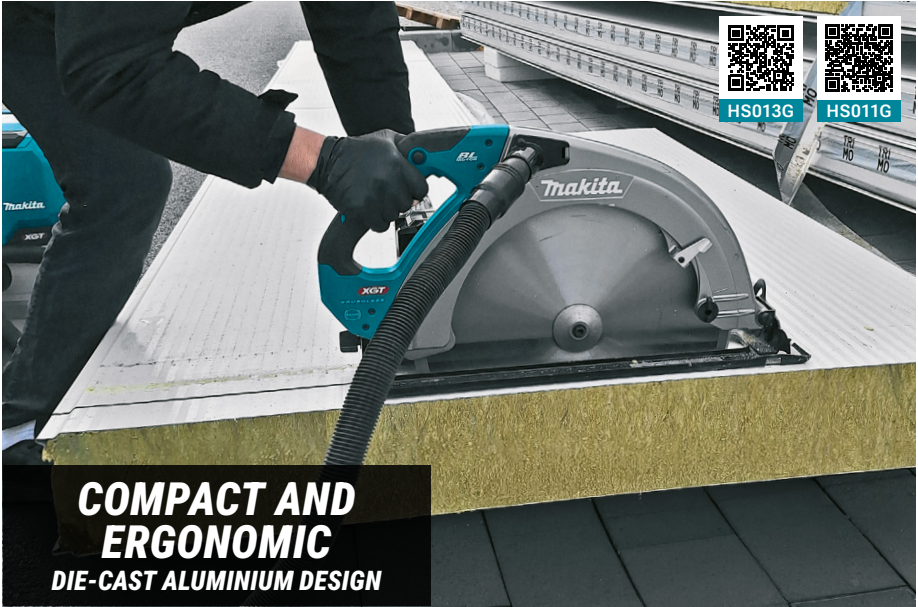

MATRIX AND PUNCH

A-15051

DJN161, Matrix

A-83951

DJN161, Punch Pin

BLADES

725092-5

DJS200, Right Blade

725093-3

DJS200, Left Blade

725255-3

DJS200, Centre Blade

BAND SAWS

IDEAL FOR CUTTING PIPES AND PROFILES

PB002G - XGT®

Capacity 127 mm

PB003G - XGT®

Capacity 66 mm

TCT SAW BLADES

METAL

Part	Diameter	Hole	Teeth
E-12859	185 mm	30 mm	45T

TCT SAW BLADES

SANDWICH PANELS

Part	Diameter	Hole	Teeth
E-30209	415 mm	30 mm	90T
B-33607	355 mm	30 mm	80T
B-33598	270 mm	30 mm	60T
B-33582	235 mm	30 mm	50T
B-63149	165 mm	20 mm	42T

TCT SAW BLADES

WOOD

Part	Diameter	Hole	Teeth
E-26886	415 mm	30 mm	35T
B-32188	355 mm	30 mm	24T
E-12946	270 mm	30 mm	24T
E-01915	235 mm	30 mm	24T
B-62985	165 mm	20 mm	25T

199826-6

QUICK-RELEASE CLAMP FOR GUIDE RAILS

1913K7-3

PARALLEL GUIDE FOR GUIDE RAILS

GUIDE RAILS

199140-0 1,0 m

199141-8 1,5 m

194367-7 3,0 m



XGT
JR002G BL MOTOR AVT

40 V MAX XGT® RECIPRO SAW

- 32 mm Stroke length
- 255 mm Wood
- 130 mm Pipes
- Orbital function
- Speed settings

On/Off orbital feature provides more aggressive cuts in wood
Equipped with AVT®, an internal counterbalance system that delivers up to 50% less vibration
Electric brake for maximum productivity

JR002GZ / without batteries and charger



XGT
JR003G BL MOTOR

40 V MAX XGT® RECIPRO SAW

- 26 mm Stroke length
- 220 mm Pipes
- Speed settings
- Electric brake

Built-in spring keeps the chain securely in place while wrapping and tightening around the pipe
The tool can also be used as a standard reciprocating saw by attaching the front grip and optional blade clamp

JR003GZ / without batteries and charger



XGT
JV002G BL MOTOR DXT AWS

40 V MAX XGT® JIG SAW

- 26 mm Stroke length
- Cutting mode
- 135 mm Wood
- 10 mm Mild steel
- 20 mm Aluminium

Constant speed control provides continuous speed during heavy cutting applications
Built-in dust blower clears the line of cut for increased accuracy

JV002GZ01 / without batteries and charger



XGT
LS002G BL MOTOR DXT AWS

40 V MAX XGT® SLIDE COMPOUND MITRE SAW

- 216 mm Saw blade
- 1-3 mm Aluminium
- 48°/48° Bevel range
- 60°/60° Miter range
- Constant speed

Cutting capacity: (0°) 70x312 mm, (45°) 70x220 mm
LED light casts a shadow of the saw blade onto the material as an exact cutting line
Rail-forward design to maximize work space

LS002GZ01 / without batteries and charger



XGT
LS004G BL MOTOR DXT AWS

40 V MAX XGT® SLIDE COMPOUND MITRE SAW

- 260 mm Saw blade
- 2-6 mm Aluminium
- 48°/48° Bevel range
- 60°/60° Miter range
- Constant speed

Cutting capacity: (0°) 68x310 / 91x279 mm, (45°) 68x218 / 91x197 mm
LED light casts a shadow of the saw blade onto the material as an exact cutting line
Rail-forward design to maximize work space

LS004GZ01 / without batteries and charger



XGT
LS003G BL MOTOR DXT AWS

40 V MAX XGT® SLIDE COMPOUND MITRE SAW

- 305 mm Saw blade
- 2-6 mm Aluminium
- 48°/48° Bevel range
- 60°/60° Miter range
- Constant speed

Cutting capacity: (0°) 92x382 / 107x363 mm, (45°) 92x268 / 107x255 mm
LED light casts a shadow of the saw blade onto the material as an exact cutting line
Rail-forward design to maximize work space

LS003GZ01 / without batteries and charger



STAPLER
DST221 - LXT®

- Ideal for installing insulation foil
- Fastens a wide range of 23 GA crown staples from 10-22 mm in height



CHAIN VICE
FOR CUTTING LARGE DIAMETER PIPES



SOFT NO-LOAD
EASIER PRECISE ALIGNMENT OF THE BLADE TO THE CUTTING LINE



RETRACTABLE EXTENSION WINGS
FOR CUTTING LONGER MATERIAL

RECIPRO SAW BLADES



Part	Diameter	Material
B-10403 ¹	455 mm	aerated concrete, brick
B-63591 ²	400 mm	aerated concrete, brick
JR003G		
E-26244 ³	260 mm	pipes ≤ Ø145 mm
E-26587 ³	350 mm	pipes ≤ Ø220 mm

B-63591
JIG SAW BLADE, SANDWICH PANELS AND STEEL PROFILES, 105 MM
JV002G

193517-1
GUIDE RAIL ADAPTER
JV002G

1915R3-2
SUPPORT GUIDE FOR PRECISE CURVED AND FREE FORM CUTTING
JV002G

CAULKING GUN
DCG180 - LXT®

- Ideal for sealing windows
- 5 speed dial optimizes flow rate
- Drip-reduction feature



B-33299
TCT SAW BLADE, ALUMINIUM, 216 MM, 64T
LS002G

E-06323
TCT EFFICUT SAW BLADE, ALUMINIUM, 260 MM, 81T
LS004G

E-13247
TCT EFFICUT SAW BLADE, ALUMINIUM, 305 MM, 81T
LS003G



198687-1
MITRE SAW BLADE
LS002G, LS003G, LS004G





XGT
VS001G

40 V MAX XGT® VACUUM SWEEPER

- 650 mm Cleaning width
- 24 l Container capacity
- 20 mm Height adjustment
- HEPA filter
- Quiet mode

3-brush design engineered for cleaning a variety of dust and waste materials
Main brush height adjustment dial, capable of small dust materials as well as plastic bottles
Automatic self-cleaning filtration system maintaining optimal suction

VS001GZ / without batteries and charger




XGT
UX01G

40 V MAX XGT® MULTI FUNCTION POWER HEAD

- 1 kW Output power
- Reverse function
- Speed settings
- 4,9 kg Weight BL4050F

Compatible with a variety of Makita attachments for various applications
AFT® turns the motor off if rotation speed suddenly slows
Electric brake quickly stops the motor for maximum productivity

UX01GZ / without batteries and charger

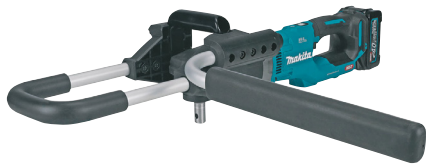

XGT
DG002G

40 V MAX XGT® EARTH AUGER

- Direct attachment
- 200 mm Drilling capacity
- Speed settings
- Torque limiter
- 7,4 kg Weight BL4050F

Ideal for post-hole digging, fence installation, large planting jobs and construction projects
Reverse switch for clearing earth auger bit from high resistance soil
Built-in LED light illuminates the work area

DG002GZ / without batteries and charger



XGT
UB004G

40 V MAX XGT® BLOWER

- 32 N Blowing force
- 96 m/s Air velocity
- 19,1 m³/min Air volume
- Speed settings
- 7,8 kg Weight BL4050F

Telescopic nozzle with stepless adjustment within a 250 mm range
2 battery system - the blower runs on one battery and switches to the second one when the first one runs out

UB004GZ / without batteries and charger



XGT
UB001G

40 V MAX XGT® BLOWER

- 17 N Blowing force
- 64 m/s Air velocity
- 16 m³/min Air volume
- Speed settings
- 3,9 kg Weight BL4050F

Speed lock and variable speed trigger for power and run time management
3-stage telescoping long nozzle for user convenience
Boost mode delivers 17 N for heavy debris

UB001GZ / without batteries and charger
UB001GD202 / with rapid charger DC40RA and 2x 2.5Ah battery BL4025



XGT
UB003G

40 V MAX XGT® BLOWER - VACUUM

- 16,0 N Blowing force
- 68 m/s Air velocity
- 13,8 m³/min Air volume
- Speed settings
- 5,0 kg Weight BL4050F

Telescopic nozzle with stepless adjustment within a 130 mm range
Mulching blades finely shred leaves during vacuuming, reducing their volume and minimizing the frequency of bag emptying

UB003GZ / without batteries and charger



SUCTION FUNCTION
MINIMISES AIRBORNE DUST KICKED UP BY THE BRUSHES



ADT TECHNOLOGY
AUTOMATICALLY ADJUSTS DRILL SPEED AND TORQUE DURING DRILLING



XGT
UB002G

40 V MAX XGT® BLOWER

- 3,1 N Blowing force
- 76 m/s Air velocity
- 3,6 m³/min Air volume
- Speed settings
- 2,9 kg Weight BL4050F

Two nozzle options: a long nozzle ideal for clearing large open spaces, and a short nozzle perfect for cleaning workspaces
Transform it into a vacuum by attaching the short nozzle to the air inlet and fitting a dust bag onto the air outlet

UB002GZ01 / without batteries and charger



XGT
UB005G

40 V MAX XGT® BLOWER - VACUUM

- 5,0 N Blowing force
- 87 m/s Air velocity
- 3,5 m³/min Air volume
- Speed settings
- 5,1 kg Weight BL4050F

Easily converts from blower to vacuum with mulcher
10:1 mulch ratio reduces up to 10 bags of leaves down to 1 bag with shredding blade
Speed lock and variable speed trigger for power and run time management

UB005GZ / without batteries and charger

199318-5
BRUSH ATTACHMENT
BR400MP, 600 MM
UX01G



199339-7
SWEEPER ATTACHMENT
SW400MP, 590 MM
UX01G



191P72-3
BLOWER ATTACHMENT
UB401MP, 17,3 N
UX01G



UB403MP
BLOWER ATTACHMENT
UB403MP, 18 N
UX01G



DEAPF400MP
PUMP ATTACHMENT
135 L/MIN
UX01G



E-25482
EARTH AUGER DRILL BIT,
50X800 MM
DG002G



E-25498
EARTH AUGER DRILL BIT,
60X800 MM
DG002G



E-25507
EARTH AUGER DRILL BIT,
80X800 MM
DG002G



1917R2-6
CUSHION BELT
UB004G



197888-8
ROUND NOZZLE
*USE WITH 191L96-5
ADAPTER
UB001G



123241-2
DUST BAG
UB002G



1918E9-7
WIDE ROUND NOZZLE
UB004G



197889-6
FLAT NOZZLE
*USE WITH 191L96-5
ADAPTER
UB001G



1918B8-8
WIDE NOZZLE
UB005G




1916T9-0
VACUUM KIT
UB003G





LXT
DCU601
18+18 V LXT® TRANSPORT TROLLEY




Designed with adjustable front and side guards that lower below platform level, allowing easy loading and unloading without any lifting required
Loading platform dimensions (L x W): 965 x 645 mm
Adjustable handlebar height: 740-980 mm

DCU601Z / without batteries and charger



LXT
DCU602
18+18 V LXT® TRANSPORT TROLLEY



Electric tipping system tilts up to 75°, then manually adjusts up to 110°
Adjustable handlebar height: 740-980 mm
Capacity by load type; dry load 200 l / wet load 100 l

DCU602Z / without batteries and charger



XGT
GP001G
40 V MAX XGT® GREASE GUN



Variable speed trigger allows the user to adjust discharge rate
Lock-on button for user convenience during longer work periods
Air bleed valve assists in faster pump priming

GP001GZ / without batteries and charger



191B67-2
PIPE FRAME,
625-1.015 X
945-1.090 MM
DCU602



1915N4-2
LOCK ON ADAPTER
GP001G



1916U8-9
ANGLE ADAPTER
GP001G



1911M9-1
EXTENSION PIPE
GP001G



166094-6
SHOULDER STRAP
GP001G



1915E6-5
ADAPTER FOR CONNECTING
A 500 G GREASE CARTRIDGE
GP001G



1914G9-7
ADAPTER FOR PUMPING
GREASE FROM BARREL
GP001G

MAKTRAK™

THE NEXT GENERATION IN MODULAR STORAGE SYSTEMS

Introducing the next generation of modular storage systems - Makita MAKTRAK. A smart storage solution with tool cases and organizers that stacks and offers easier access and easier loading/unloading in the trunk of a pickup truck or van.

MAKTRAK tool cases keep your tools safe and within reach. The cases feature a double-hinged lid that allows access from both sides

without having to unload the boxes, while the innovative horizontal design allows you to store larger tools such as nailers, saws and hammer drills.

MAKTRAK organizers are designed to keep your workspace efficient and your items within reach. Choose from deep mid, low mid and deep compact organizers, all designed with maximum durability and storage efficiency in mind.



P-91001
ROLLING TOOL CHEST
Lid with dual hinges allows easy access from both sides
Durable handle extends up to 387 mm for easier transport

Carrying capacity	113 kg
Volume	81,9 l
Dimensions (L x W x H)	1.011 x 565 x 295 mm
Weight	17,44 kg




P-91017
LARGE TOOLBOX
Lid with dual hinges allows easy access from both sides
Removable tray designed for organized storage of tools and accessories.

Carrying capacity	45 kg
Volume	63 l
Dimensions (L x W x H)	802 x 565 x 252 mm
Weight	10,11 kg



P-91023
XL EXTENSION TOOLBOX
Lid with dual hinges allows easy access from the top
Two stacking options; attach to the side or top of the Rolling Tool Chest.,

Carrying capacity	45 kg
Volume	58,4 l
Dimensions (L x W x H)	394 x 565 x 402 mm
Weight	7,21 kg

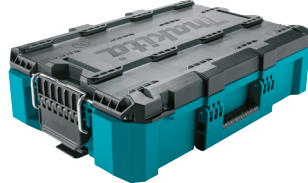

P-91039
MEDIUM TOOLBOX
2 removable trays for storing tools, accessories, batteries, chargers and small parts

Carrying capacity	34 kg
Volume	18,4 l
Dimensions (L x W x H)	387 x 562 x 161 mm
Weight	4,45 kg



P-91045
DEEP MEDIUM ORGANISER
Clear lid to easily see inside and rib design secures bins in place
127 mm deep bins

Carrying capacity	22,6 kg
Volume	18,4 l
Dimensions (L x W x H)	387 x 562 x 163 mm
Weight	4,87 kg



P-91051
LOW PROFILE MEDIUM ORGANISER
Clear lid to easily see inside and rib design secures bins in place

Volume	8,14 l
Dimensions (L x W x H)	387 x 596 x 85 mm
Weight	2,89 kg



P-91067
DEEP COMPACT ORGANISER
Clear lid to easily see inside and rib design secures bins in place
127 mm deep bins

Volume	8,55 l
Dimensions (L x W x H)	278 x 389 x 162 mm
Weight	2,59 kg



ML014G
XGT®/LXT® LED LIGHT ON STAND

15.000 lm
Luminous flux

5.000 lx
Illuminance

180°
Rotatable lights

180°
Rotatable head

2.4 m
Height adjustment

8 m ↑
8 m ↔

Stepless brightness adjustment 1.100-15.000 lm
Foldable design for quick setup and takedown
The light's feet can be anchored to the ground to prevent tipping

ML014G / without batteries and charger



ML010G
XGT®/LXT® LED AREA LIGHT

5.500 lm
Luminous flux

550 lx
Illuminance

Connect multiple units

80°
Self righting

3 illumination modes: 360°, left 180° and right 180°
AC inlet and outlet can be used to chain multiple lights together
IP54 water and dust protection

ML010G / without batteries and charger



LARGE RANGE OF
CORDLESS LIGHTS



ML009G
XGT®/LXT® LED WORK LIGHT

10.000 lm
Luminous flux

4.300 lx
Illuminance

Tripod mount

Battery warning

9,7 m ↑
11,4 m ↔

Compatible with 40 V Max XGT® or 18V LXT® batteries
Adjusting knobs enable the user to direct the flood light to desired angle
Carrying handle folds down for convenience

ML009G / without batteries and charger



ML005G
XGT®/LXT® LED WORK LIGHT

3.600 lm
Luminous flux

2.100 lx
Illuminance

Tripod mount

Battery warning

6 m ↑
6,4 m ↔

Compatible with 40 V Max XGT® or 18V LXT® batteries
Adjusting knobs enable the user to direct the flood light to desired angle
Carrying handle folds down for convenience

ML005G / without batteries and charger
ML005GX / without batteries and charger and with lamp shade



ML012G
40 V MAX XGT® LED LIGHT

1.700 lm
Luminous flux

600 lx
Illuminance

5.000 K
Color temperature

180°
Pivoting range

The LED light bar section folds in half for double-sided illumination and compact storage or transport
Telescopic hook, top hook and 3 strap holes provide multiple mounting options
7 adjustable rotating illumination angles (-90°-180°)

ML012G / without batteries and charger



ML011G
40 V MAX XGT® LED COMPACT LIGHT

300 lm
Luminous flux

240 lx
Illuminance

5.000 K
Color temperature

Built-in USB port for charging portable electronic devices
Compact size of 107x50 mm - LxH without battery
3 illumination modes: top+side lights / top light / side light

ML011G / without batteries and charger



ML013G
40 V MAX XGT® LED MAGNETIC LIGHT

1.200 lm
Luminous flux

400 lx
Illuminance

Magnetic base

180°
Rotatable head

Easily deactivate the magnetic base with the magnet cover
Multiple mounting options: magnetic base or hanging hook
The light head folds 180° and turns off automatically when fully closed

ML013G / without batteries and charger



DML817
18 V LXT® LED COMPACT LIGHT

300 lm
Luminous flux

240 lx
Illuminance

5.000 K
Color temperature

Built-in USB port for charging portable electronic devices
Compact size of 107x50 mm - LxH without battery
3 illumination modes: top+side lights / top light / side light

DML817 / without batteries and charger



ML007G
40 V MAX XGT® LED FLASHLIGHT

1.250 lm
Luminous flux

82.000 lx
Illuminance

5.000 K
Color temperature

90°
Pivoting range

Lightning modes

Spot mode
640 m ↑

2,8 m ↑
3 m ↔

4 lighting modes: (spot mode / spot-flood mode / flood mode / strobe mode)
Adjustable head: 90° up / down
Battery capacity warning function

ML007G / without batteries and charger



MR014G
XGT®/LXT®/AC BLUETOOTH SPEAKER

Bluetooth

Connect multiple units

IP65
Dust / water protection

XGT 4Ah
39 h
runtime

LXT 5Ah
28 h
runtime

Bluetooth® 5.1 delivers up to 100 m range for connectivity throughout the job site
With AUX-in jack and USB-out port for charging smart devices

MR014GZ / without batteries and charger



DEAADP001G
ADAPTER FOR USB CHARGING

Mount the ADP001G onto your 40 V Max XGT® Battery and turn it into a charging adapter for two smart devices.
2x USB port type A - 2,4 A



DECADP05
ADAPTER FOR USB CHARGING

Mount the DECADP05 onto your 18 V LXT® Battery and turn it into a charging adapter for two smart devices.
2x USB port type A - 2,1 A



MAKITAUK.COM



*Accessories shown are not necessarily supplied as standard equipment.
Specification shown may change owing to our policy of constant improvement.
Subject to availability. E&OE.*