

Makita[®]

FACILITIES MANAGEMENT CATALOGUE

2023 - 2024



COMMERCIAL CLEANING

- XGT BACKPACK VACUUM: 5
- XGT STICK VACUUMS: 7
- XGT TUB VACUUMS: 9
- LXT ROBOTIC VACUUM : 13
- LXT BACKPACK VACUUMS: 15
- LXT STICK VACUUMS : 17
- LXT UPRIGHT VACUUM: 19
- LXT VACUUM CLEANERS : 21
- LXT TUB VACUUMS: 23

BOOK YOUR CORDLESS CLEANING EXPERIENCE

Makita UK would like to invite you to get to grips with our cordless cleaning tools via an appointment with one of our experienced team members.

Scan the QR code to apply or visit makitauk.com:



GROUNDS MAINTENANCE

- BLOWERS: 31
- SPLIT SHAFTS: 33
- BACKPACK BATTERIES: 37
- POWER WASHERS: 39

BOOK YOUR CORDLESS GARDEN EXPERIENCE

Makita UK would like to invite you to get to grips with our cordless garden power tools via an appointment with one of our experienced team members.

Scan the QR code to apply or visit makitauk.com:



BATTERY & CHARGER INFORMATION



18V LXT 6.0 Ah	BL1860B (197422-4) 	40 Minute Charge 1-2 Batteries with ADP10 Adaptor	55 Minute Charge 1-2 Batteries
18V LXT 5.0 Ah	BL1850B (197280-8) 	35 Minute Charge 1-2 Batteries with ADP10 Adaptor	45 Minute Charge 1-2 Batteries
18V LXT 3.0 Ah	BL1830B (197599-5) 	22 Minute Charge 1-2 Batteries with ADP10 Adaptor	22 Minute Charge 1-2 Batteries
40V Max XGT 8.0 Ah	BL4080F (191X65-8) 	72 Minute Charge 1-2 Batteries	
40V Max XGT 5.0 Ah	BL4050F (191L47-8) 	50 Minute Charge 1-2 Batteries	
40V Max XGT 4.0 Ah	BL4040 (191B26-6) 	45 Minute Charge 1-2 Batteries	
40V Max XGT 2.5 Ah	BL4025 (191B36-3) 	28 Minute Charge 1-2 Batteries	

Rapid Charging System

The charger will cool down the battery before charging if the battery temperature is high. Built-in fan circulates air through the battery before charging and during to cool the battery for a faster charge time.

The optimum charging system

Forced air cooling



Fast charging




General charging method


Natural heat dissipation



Waiting time for charging

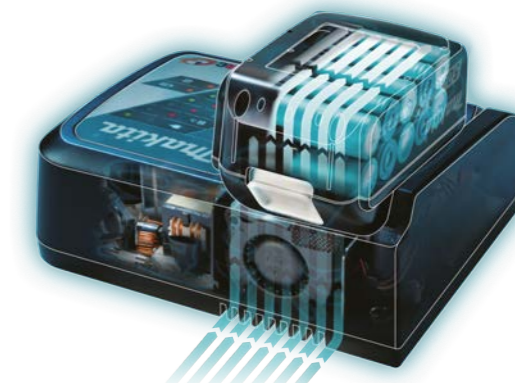

Battery Protection Function

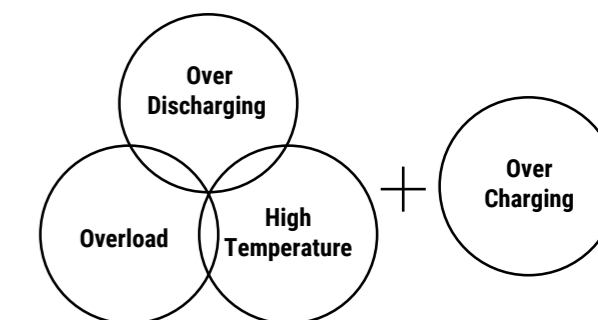

This communication technology allows the tool and battery to monitor conditions and exchange data in real time to protect against Overload, Over-Discharge and Overheating.

Anytime Charge
No Memory Effect
No Discharging Required



Shock Absorbing
Heavy Duty Pack





XGT is a system with its own tools, batteries, and chargers. A combination of innovative tool design and higher output batteries provide a genuine solution for high demand industrial users.

Optimum power supply and charging system

The XGT range of tools and batteries come with a built-in program, providing digital communication between the battery and tool. Allowing not only for the battery to talk with tool but also the tool to talk to the battery. A battery technology and motor that work together for optimum performance.


Digital communication

Tool ◀▶ Battery ◀▶ Battery Charger





Optimum Charging System

Auto maintenance system with two cooling fans to provide faster charging




Built Tough

4-LED fuel gauge indicator

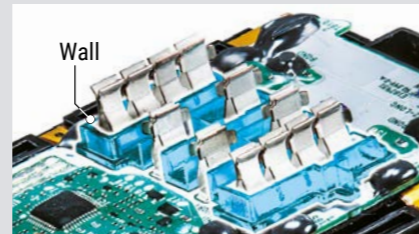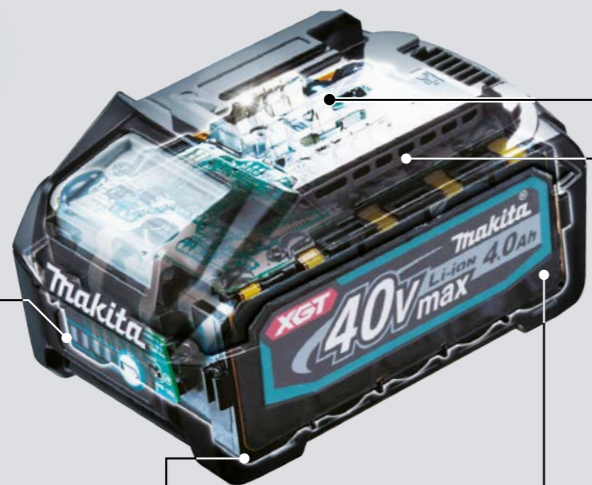


Terminal short-circuit prevention structure

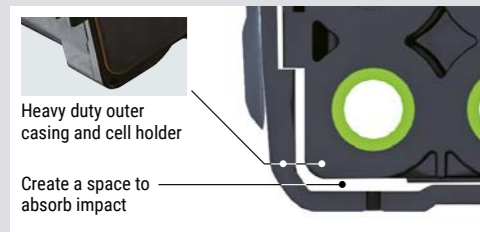

Heavy duty outer casing and cell holder
Create a space to absorb impact

Shock Absorption Structure

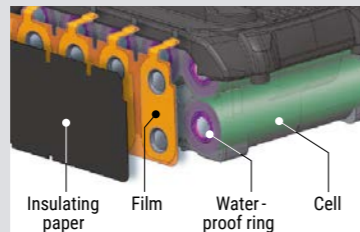

Insulating paper
Film
Water-proof ring
Cell

Waterproof Triple-layer Structure



High Rigidity Battery Rails



BACKPACK VACUUMS

BLOWERS

STICK VACUUMS

M-CLASS TUB VACUUM/EXTRACTOR

L-CLASS TUB VACUUMS



XGT BACKPACK VACUUM CLEANER

VC008G XGT 40V | Brushless Motor | HEPA Filter



SPECIFICATIONS	VC008G
Voltage	40V
Brushless Motor	Yes
Sealed Suction	18kPa
Air Volume	2.4m³/min
Speed settings	4
Suction Power	25/55/100/195 W
Filter	HEPA
Weight	5.3kg
Capacity	Paper: 2L / Cloth: 1.5L
Run Time	5Ah: 110/55/30/14 mins
Sound Pressure Level	72 dB(A) Max
LED Light	Yes
Warranty	1 Year + 2 Years Online

STANDARD EQUIPMENT:

Nozzle assembly, bent pipe assembly, telescopic pipe, hose, filter bag, nozzle.



ACCESSORIES

Nozzle assembly set 127082-8		Seat nozzle 28 199038-1		Oval brush 198878-4		Hose (32mm x 1.0m) 199453-9	
F/C switching t-nozzle 28 198532-0		Corner nozzle 410306-2		Shelf brush 198873-4		Hose (38mm x 1.5m) 199388-4	
Nozzle assembly 127082-8		Corner nozzle 330 198919-6		Telescopic pipe 140G19-0		Protective Cover 1911W4-1	
Nozzle assembly 123486-2		Flexible rubber nozzle 28 197901-2		Bending pipe 140G26-3			
Filter Bag Set 2L 197903-8		Dust Bag Assy Set 197899-3		Main Filter H Set 127725-2			

COMFORTABLE HARNESS

Cushioned harness features adjustable shoulder and waist belts to suit the users size for more comfortable use during long operation. The lower belt can be used for carrying nozzles.

HEPA FILTER

HEPA Filter is used to capture 99.97% of particles as small as 0.3-1 µm.

BRUSHLESS

The brushless motor is more energy efficient providing greater run time.

XGT 40V STICK VACUUM CLEANERS

CL001G XGT 40V | Brushless Motor



STANDARD EQUIPMENT:

Floor Tool, Straight Pipe, Sash Nozzle, Shake Off Filter

CL002G XGT 40V | Brushless Motor



STANDARD EQUIPMENT:

Floor Tool, Straight Pipe, Sash Nozzle, Shake Off Filter

CL003G XGT 40V | Brushless Motor



STANDARD EQUIPMENT:

Floor Tool, Straight Pipe, Sash Nozzle, Shake Off Filter

CAPSULE TYPE




PUSH BUTTON SWITCH



DUST BAG TYPE



PUSH BUTTON SWITCH

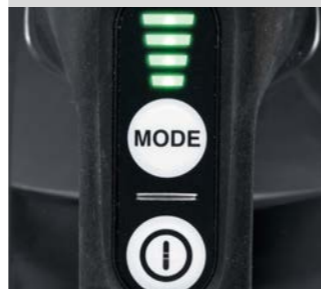

CYCLONE CAPSULE



PUSH BUTTON SWITCH



SPECIFICATIONS	CL001G (BLUE/BLACK)
Voltage	40V
Brushless Motor	Yes
Sealed Suction	21 kPa
Air Volume	1.2 m ³ /min
Speed settings	4
Suction Power	20/45/70/125 W
Filter	Quick Shake Off
Weight	1.7 - 2.3 kg
Capacity	730ml
Run Time	2.5Ah: 80/40/25/16 mins
Sound Pressure Level	54/59/62/65 dB(A)
LED Light	Yes
Warranty	1 Year + 2 Years Online

SPECIFICATIONS	CL002G (BLACK)
Voltage	40V
Brushless Motor	Yes
Sealed Suction	21 kPa
Air Volume	1.2 m ³ /min
Speed settings	4
Suction Power	20/45/70/125 W
Filter	Paper Bag Type
Weight	1.8 - 3.0 kg
Capacity	Cloth 500ml / Paper 330ml
Run Time	2.5Ah: 80/40/25/16 mins
Sound Pressure Level	54/59/62/65 dB(A)
LED Light	Yes
Warranty	1 Year + 2 Years Online

SPECIFICATIONS	CL003G (BLACK)
Voltage	40V
Brushless Motor	Yes
Sealed Suction	20 kPa
Air Volume	1.0 m ³ /min
Speed settings	4
Suction Power	15/35/60/100 W
Filter	Easy Shake Off
Weight	1.9 - 3.0 kg
Capacity	250ml
Run Time	2.5Ah: 80/40/25/16 mins
Sound Pressure Level	54/59/62/65 dB(A)
LED Light	Yes
Warranty	1 Year + 2 Years Online

ACCESSORIES

CL001G Only

Shake Off Filter (Standard) 199966-0		HEPA Filter 199989-8	
--------------------------------------	--	----------------------	--

CL002G Only

Reusable Cloth Bag 1910M4-5		Paper Bag (Pack of 5) 194566-1	
-----------------------------	--	--------------------------------	--

CL003G Only

Quick shake off filter with HEPA 1910C9-5		Quick Shake off filter 1910C7-9	
---	--	---------------------------------	--

CL001G & CL002G Only

Cyclone Attachment Black 191D73-9		Straight Pipe with Lock 191D77-1	
-----------------------------------	--	----------------------------------	--

CL001G, CL002G & CL003G

Floor T Nozzle 198525-7 (White)		T Nozzle 123539-7	
Floor T Nozzle 198523-1 (Blue)		Sheet/Car Seat Nozzle 199041-2 (Blue)	
Car Seat Nozzle (White) 199038-1		Nozzle Assembly 127082-8	
Oval Brush 198878-4 (White)		Clip For Crevice Nozzle 459039-6	
Shelf Brush 198873-4 (White)		Freestanding Floor Stand 1911L1-0	

CYCLONE ATTACHMENT

The efficient cyclonic action captures up to 90% of dust particles and increases productivity by reducing the need to empty the main canister/filter by 84%.

Disposal is a breeze with its one-touch release.

- Increased Storage Capacity
- Easy One Touch Release
- Powerful Suction



XGT TUB VACUUM CLEANERS

VC001GL XGT 40V | Wet & Dry | L-CLASS



SPECIFICATIONS	VC001GL
Voltage	40V
Brushless Motor	Yes
Sealed Suction	23kPa
Air Volume	3.2m ³ /min
Speed settings	1
Suction Power	265W
Filter	L Class
Weight	8.1 - 10.0kg
Capacity	Dry: 8L / Wet: 6L
Run Time	2x 5ah: 28 - 220mins
Sound Pressure Level	70 dB(A) or less
LED Light	No
Warranty	1 Year + 2 Years Online

STANDARD EQUIPMENT:

1.7m x 32mm hose, cloth filter set, nozzle assembly, telescopic pipe, bent pipe, poly bag set, multi-hook, stopper, long sash nozzle

VC003GL XGT 40V | Wet & Dry | L-CLASS



SPECIFICATIONS	VC003GL
Voltage	40V
Brushless Motor	Yes
Sealed Suction	23kPa
Air Volume	3.2m ³ /min
Speed settings	1
Suction Power	265W
Filter	L Class
Weight	8.4 - 10.3kg
Capacity	Dry: 15L / Wet: 12L
Run Time	2x 5ah: 28 - 220mins
Sound Pressure Level	70 dB(A) or less
LED Light	No
Warranty	1 Year + 2 Years Online

STANDARD EQUIPMENT:

1.7m x 32mm hose, cloth filter set, nozzle assembly, telescopic pipe, bent pipe, poly bag set, multi-hook, stopper, long sash nozzle

VC005GL XGT 40V | L-CLASS



SPECIFICATIONS	VC005GL
Voltage	40V
Brushless Motor	Yes
Sealed Suction	23kPa
Air Volume	2.8m ³ /min
Speed settings	1
Suction Power	265W
Filter	L Class
Weight	7.9 - 11.0kg
Capacity	8L
Run Time	2x 5ah: 28 - 220mins
Sound Pressure Level	70 dB(A) or less
LED Light	No
Warranty	1 Year + 2 Years Online

STANDARD EQUIPMENT:

1.7m x 32mm hose, telescopic pipe, bent pipe, poly bag set, multi-hook, stopper, long sash nozzle

ACCESSORIES

VC003G Only		VC005GL Only	
fleece dust bag 15l (5pcs) 195557-5		Cloth Filter 191V71-1	
VC001GL & VC003GL Only			
Wet Filter 191V67-2		Cloth Filter 144625-1	
VC001GL & VC005GL Only			
Dust Paper Filter 7L 1912R3-4			
VC001GL, VC003GL & VC005GL			
Floor T Nozzle 191G86-8 (White)		Sash Nozzle 198919-6 (White)	
Aluminium Telescopic Pipe 140G19-0		Bent Pipe 140G26-3	
Hose 32mm x 1.7m 199493-7		Powder Filter H Set 191V70-3	
Pre Filter Set 191V69-8		Damper Set 191V68-0	
Poly Bag (Pack of 10) 195432-5			




L-CLASS IS SUITABLE FOR
Mica, china clay and gypsum.
REMOVES 99% OF DUST WITH A LIMIT VALUE FOR OCCUPATIONAL EXPOSURE > 1.0 MG/M³



LXT is a system with its own tools, batteries, and chargers. A combination of innovative tool design and optimum power provide a genuine solution for high demand industrial users.


Optimum power supply and charging system

The LXT range of tools and batteries come with a built-in program, providing digital communication between the battery and tool. Allowing not only for the battery to talk with tool but also the tool to talk to the battery. A battery technology and motor that work together for optimum performance.

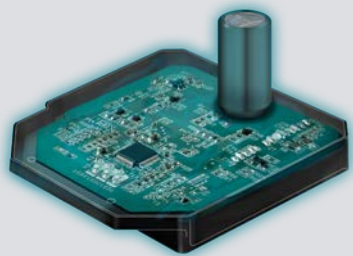

Built Tough

4-LED fuel gauge indicator

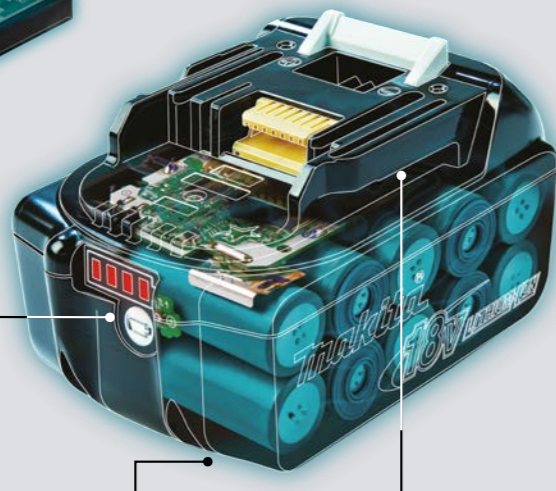

Heavy duty outer casing and cell holder



Create a space to absorb impact



High Rigidity Battery Rails

Shock Absorption Structure



OPTIMUM CHARGING

After use a battery reaches a high temperature and it is necessary to cool the battery down before you charge it. Makita are able to produce fast charge times because our batteries and chargers are kept cool whilst the battery is connected.



LONGER WORK TIME

Makita's 18v & 14v batteries have a built in memory chip that records the battery usage history. While the battery is connected it will transmit the data to the charger.



BUILT-IN CPU

The CPU built into the charger communicates with the individual battery and analyses its condition; the battery may have been abused by heat, overdischarging, or weathered by cycle-age. This optimised charging system extends the life of the battery.



ANYTIME CHARGE

A great advantage of Lithium Ion technology is that it provides the user with the possibility to charge the batteries anytime, without any need to wait for their complete power deployment. A great improvement compared to older technologies like Ni-Cad.

BACKPACK VACUUMS



UPRIGHT VACUUM



STICK VACUUMS



ROBOTIC VACUUMS



CYCLONE VACUUM



BLOWERS

VACUUMS




TUB VACUUMS




LXT 18V ROBOTIC VACUUM CLEANER

DRC300 LXT 18V | Brushless Motor | HEPA





LiDAR Sensor Module:
The 2D LiDAR sensor rotates continuously through 360 degrees to map a room.



Camera Sensor:
Gives a basic 3D shape to the obstacles the LiDAR scanner discovers.

STANDARD EQUIPMENT:

RF remote controller, Side brush assembly.

SPECIFICATIONS	DRC300	DRC200
Voltage	18V	18V
Brushless Motor	Yes	Yes
Running Speed	0.3m/s	0.3m/s
Indication	Buzzer and LED	Buzzer and LED
Speed settings	1	1
Filter	HEPA	HEPA
Weight	9.6kg - 10.6kg	7.8kg
Capacity	3L	2.5L
Run Time	2x 6.0Ah Hard Floor: 240 / Carpet: 204 min	2x 6.0Ah Hard Floor: 240 / Carpet: 204 min
Sound Pressure Level	-	-
LED Light	No	No
Warranty	1 Year + 2 Years Online	1 Year + 2 Years Online



BRUSHES

The side brush enable cleaning along the walls and around tight corners. The power brush is a 50x260mm rotating brush.



2 X 18V BATTERIES

Powered by two 18V Li-ion batteries in parallel. When the first battery runs out the second battery takes over.




DUST BOX AND FILTER

Dust box with 3L capacity easily removed and re-fitted. Equipped with a quality efficient filter as used on all Makita vacuums.




TRACK CLEANING HISTORY

Cleaning history, such as cleaning date and time, percentage of completed cleaning area and more, can be displayed and saved as evidence.

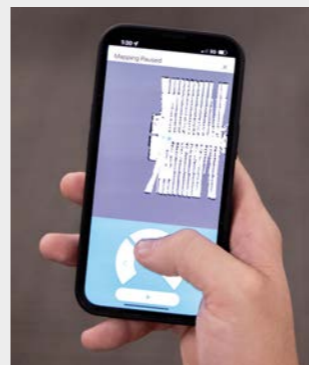

LONG RUN TIME

600M² maximum cleaning area on a full charge (with 2x BL1860B batteries), approximately the size of three tennis courts. The DRC300 can also map and memorise up to 5 separate rooms.

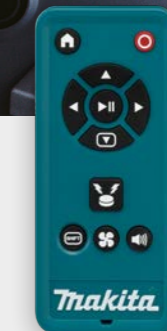

TOTAL CONTROL

Control via the RF Remote or use the smartphone app and track the cleaning progress and history.



LXT 36V (18V X2) BACKPACK VACUUM CLEANERS

DVC660 LXT 36V (18V x2) | Brushless Motor | HEPA Filter



DVC261 LXT 36V (18V x2) | Brushless Motor | HEPA Filter



DUST BAG CLEANING

Manually clean the dust bag by pulling down the lever.



COMFORTABLE HARNESS

Features shoulder and waist belts adjustable to suit the users size for more comfortable use during long operation.



LARGE DUST CAPACITY

DVC660 has 6L and the DVC261 has 2L.




HEPA FILTER

Used as the main filter to capture fine particles. Able to capture 99.97% of particles.



CONTROL WITH LED LIGHT

On/off switch, high/low power selection, on/off switch for LED job light.

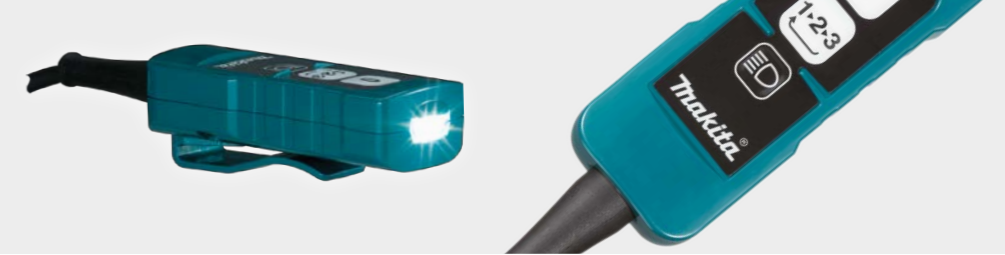

SPECIFICATIONS	DVC660Z	DVC261ZX11
Voltage	36V (18V X2)	36V (18V X2)
Brushless Motor	Yes	Yes
Sealed Suction	11kPa	11kPa
Air Volume	2.2m³/min	2.3m³/min
Speed settings	3	3
Suction Power	Low: 25 / Medium:50 / High: 95W	Low: 30 / Medium:55 / High: 105W
Filter	HEPA	HEPA
Weight	6.7kg	4.5kg
Capacity	6L	2L
Run Time	6.0Ah Low: 140 / Medium: 75 / High: 40mins	6.0Ah Low: 140 / Medium: 75 / High: 40mins
Sound Pressure Level	70dB(A) Max	70dB(A) Max
LED Light	Yes	Yes
Warranty	1 Year + 2 Years Online	1 Year + 2 Years Online

STANDARD EQUIPMENT:

DVC660Z: Floor nozzle, Flexible rubber nozzle, Telescopic pipe assembly, 32mm x 1m hose, Bent pipe, Hose band, Filter bag.
 DVC261ZX11: Floor nozzle, Flexible rubber nozzle, Telescopic pipe assembly, 28mm x 1m hose, Bent pipe, Hose band, Filter bag.

ACCESSORIES

Floor T Nozzle 123486-2 (Small)	Filter Bag (10 Pack) 197903-8 (DVC261) 191C26-2 (DVC660)	Reusable Bag 197899-3 (DVC261) 191C30-1 (DVC660)	Plastic Telescopic Pipe 123584-2 (White)
F/C switching t-nozzle 28 198532-0 (Combi)	Oval Brush 198878-4 (White)	Filter Assembly 127725-2 (DVC261) 191D12-9 (DVC660)	Aluminium Telescopic Pipe 140G19-0
Nozzle Assembly 127082-8 (Large)	Flexible Hose 191496-7 (White)	Hose 143787-2 (DVC261) 199453-9 (DVC660)	Straight Aluminium Pipe 199844-4
Flexible Rubber Nozzle 197901-2	Car Seat Nozzle 199041-2 (Blue)	Sash Nozzle 451240-7 (White) 198990-0 (Large Blue)	Carpet Nozzle Assembly 1911J6-6
Harness 162469-7 (DVC261) 162700-1 (DVC660)	Bent Pipe Assembly 127093-3 (DVC261) 126756-8 (DVC261) 140G26-3 (DVC660)	Shelf Brush 198873-4 (White)	Hard Floor Nozzle Assembly 1911J4-0

LXT 18V STICK VACUUM CLEANERS

DCL280 LXT 18V | Brushless Motor

COLOUR OPTIONS:

BLUE: DCL280FZ
WHITE: DCL280FZW



STANDARD EQUIPMENT:

Floor Tool, Straight Pipe, Sash Nozzle

DCL281 LXT 18V | Brushless Motor



STANDARD EQUIPMENT:

Floor Tool, Straight Pipe, Sash Nozzle

DCL282 LXT 18V | Brushless Motor



STANDARD EQUIPMENT:

Floor Tool, Straight Pipe, Sash Nozzle



CAPSULE TYPE



TRIGGER & SLIDE SWITCH



CAPSULE TYPE



PUSH BUTTON SWITCH



DUST BAG TYPE



PUSH BUTTON SWITCH

SPECIFICATIONS	DCL280FZ (BLUE) - DCL280FZW (WHITE)
Voltage	18V
Brushless Motor	Yes
Sealed Suction	6.4 kPa
Air Volume	1.4 m ³ /min
Speed settings	1
Suction Power	45W
Filter	Quick Shake Off
Weight	1.2 - 1.6 kg
Capacity	750ml
Run Time	6.0Ah 40 mins
Sound Pressure Level	70 dB(A)
LED Light	Yes
Warranty	1 Year + 2 Years Online

SPECIFICATIONS	DCL281FZB (BLACK & CLEAR BLUE)
Voltage	18V
Brushless Motor	Yes
Sealed Suction	8.2 kPa
Air Volume	1.5 m ³ /min
Speed settings	3
Suction Power	Max: 60 / High: 45 / Low: 15W
Filter	Quick Shake Off
Weight	1.2 - 1.6 kg
Capacity	750ml
Run Time	6.0Ah Normal: 100 / High: 40 / Max: 30 mins
Sound Pressure Level	71 dB(A)
LED Light	Yes
Warranty	1 Year + 2 Years Online

SPECIFICATIONS	DCL282FZ (BLUE)
Voltage	18V
Brushless Motor	Yes
Sealed Suction	8.2 kPa
Air Volume	1.5 m ³ /min
Speed settings	3
Suction Power	Max: 60 / High: 45 / Low: 15W
Filter	Paper Bag
Weight	1.3 - 1.6 kg
Capacity	Cloth 500 / Paper 330ml
Run Time	6.0Ah Normal: 100 / High: 40 / Max: 30 mins
Sound Pressure Level	72 dB(A)
LED Light	Yes
Warranty	1 Year + 2 Years Online

ACCESSORIES			
DCL280 / DCL281 Only:		DCL282 Only:	
Shake Off Filter (Standard) 199966-0		Cloth Bag 166084-9	
HEPA Filter 199989-8		Paper Bag (Pack of 5) 194566-1	
DCL280 / DCL281 / DCL282:			
Floor T Nozzle 198523-1 (Blue) 198525-7 (White)		Sheet/Car Seat Nozzle 199041-2 (Blue)	
T Nozzle 123539-7		Straight Pipe 459356-2 (Blue) 459353-8 (White) 458942-6 (Black)	
Oval Brush 198878-4 (White)		Flexible Hose 198541-9 (Blue) 198867-9 (White)	
Shelf Brush 198538-8 (Blue) 198873-4 (White)		Wall Bracket 199971-7	
Sash Nozzle 451243-1 (Blue) 451240-7 (White) 456586-6 (Black)		Freestanding Floor Stand 1911L1-0	
Aluminium Joint Pipe 199844-4		Aluminium Straight Pie 199843-6	

CYCLONE ATTACHMENT

The efficient cyclonic action captures up to 90% of dust particles and increases productivity by reducing the need to empty the main canister/filter by 84%.

Disposal is a breeze with its one-touch release.



CYCLONE ACCESSORIES:

Cyclone Attachments with Locking Mechanism 191D71-3 (White) 191D73-9 (Black)

Straight Pipe with Locking Mechanism 191D76-3 (White) 191D77-1 (Black)




LXT 36V (18V X2) UPRIGHT VACUUM CLEANER

DVC560 LXT 36V (18V X2) | Brushless Motor | HEPA Filter



HEIGHT ADJUSTMENT

Brush height adjustment dial for cleaning carpet or hard floor application.

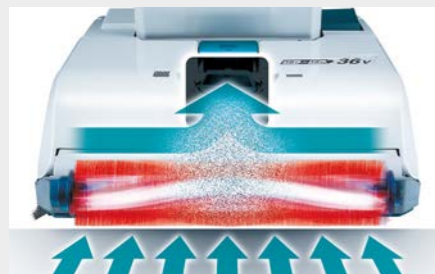

EASY MAINTENANCE

Tool-less brush removal for easy maintenance.



HEPA FILTER

5.0L Capacity disposable bags with HEPA filter that captures up 99.97% of particles.



90° TILT ANGLE

Main body can tilt up to 90 degrees. This enables cleaning in tight spaces.



LED LIGHT

LED light for working in dark or dimly lit spaces.



CONTROL PANEL

Speed indicator, dust disposal warning lamp, brush roll error lamp and battery capacity warning lamp.



SPECIFICATIONS	DVC560Z
Voltage	36V (18V X2)
Brushless Motor	Yes
Sealed Suction	12kPa
Air Volume	1.9m³/min
Speed settings	3
Suction Power	Silent: 25 / Normal: 50 / Power: 85W
Filter	HEPA
Weight	8.3 - 9.0kg
Capacity	5L
Run Time	6.0Ah Max: 30 / Normal: 60 / Low: 120 min
Sound Pressure Level	67dB(A) Max
LED Light	Yes
Warranty	1 Year + 2 Years Online

- 3x speed/ power settings by push button (with memory function).
- Front bumper protects walls and furniture from scratches/damage
- Two different Brushless motors: One for vacuuming dust and the other for rotating brush. The two motors are separately controlled according to the selected suction mode.
- Extendable hose with removable aluminium pipe with integrated handle: You can clean in corners or confined spaces by using the pipe and hose, with the machine standing upright. Brush roll automatically stops so as not to damage the carpet.

ACCESSORIES					
Long Sash Nozzle 191D65-8 (White)		Brush 1910T8-6		Filter Bag (Pack of 10) 191D63-2	
Round Brush 191D67-4 (White)		Filter 191E39-5		Reusable Bag 191Y86-6	

STANDARD EQUIPMENT:

Long sash nozzle, Round brush, Filter bag, HEPA filter.

LXT 18V VACUUM CLEANERS

DVC750L LXT 18V | Brushless Motor | HEPA Filter | Wet & Dry | L-CLASS



LARGE DUST CAPACITY

7.5L Recoverable Dust capacity.
4.5L Recoverable Water capacity.



LIGHT AND COMPACT

The weight of the tool is removed from the users wrist and hand by using the clip on shoulder strap.



HEPA FILTER

7.5L Capacity disposable bags with HEPA filter that captures up 99.97% of particles.



SPECIFICATIONS	DVC750LZ
Voltage	18V
Brushless Motor	Yes
Sealed Suction	High: 6.7 / Low: 4.2kPa
Air Volume	High: 1.6 / Low: 1.3 m³/min
Speed settings	2
Suction Power	High: 50 / Low: 25W
Filter	HEPA
Weight	4.3 - 4.6kg
Capacity (Dry/Wet)	Dry: 7.5L / Wet: 4.5L
Run Time	5.0Ah High: 30 / Low: 60 mins
Sound Pressure Level	76 dB(A)
LED Light	No
Warranty	1 Year + 2 Years Online

ACCESSORIES			
Wet Filter 191M39-3		Sash Nozzle 458919-1 (Black)	
Filter 162518-0 (Standard)		Hose 140G04-3	
Pre Filter 162635-6		Shoulder Belt 199486-4	
Wide Nozzle 458891-7 (Black)		Joint 418500-0	

STANDARD EQUIPMENT:

Wide nozzle, crevice nozzle, 2m x 28mm hose.

DCL184 LXT 18V | Brushless Motor



CONTROLS

On/off and variable 3-stage speed control via on touch push buttons



EASY BAG CHANGE

Simply open the door on the side of the vacuum to access and change the bag.



BATTERY WARNING LAMP

The DCL184 features a battery capacity warning lamp.



SPECIFICATIONS	DCL184Z
Voltage	18V
Brushless Motor	No
Sealed Suction	5.4 kPa
Air Volume	1.4m³/min
Speed settings	3
Suction Power	Max: 38 / High: 23 / Normal: 5W
Filter	Standard
Weight	1.8 - 2.2kg
Capacity	Cloth: 550ml / Paper: 330ml
Run Time	6.0Ah Max: 40 / High: 60 / Normal: 160 mins
Sound Pressure Level	68 dB(A)
LED Light	No
Warranty	1 Year + 2 Years Online

ACCESSORIES			
Mat Nozzle 120 459056-4		Hose 140H92-6	
Soft Brush 360 140H94-2		Shoulder Belt 162544-9	
Seat Nozzle 140H95-0		Tool Bag 832188-6	
Blower Nozzle 140J64-3		Rubber Nozzle 422437-5	
Cloth Bag 166084-9		Paper Bag (Pack of 5) 194566-1	

STANDARD EQUIPMENT:

Seat Nozzle, Mat Nozzle, Rubber Nozzle, Soft Brush, Blower Attachment, Dust Bag, Paper Dust Bag, Shoulder Belt.

LXT 36V (18V X2) AND MAINS TUB VACUUM CLEANERS

DVC151L / DVC861L / LXT 36V (18V X2) | 240V & 110V | Dry | L-CLASS




- Dual Voltage: 36V (18V x2) / 240V or 110V
- Dry Use Only



BATTERY LAMP AND VARIABLE SPEED DIAL

A battery lamp display which allows the user to see the current charge for both 18V batteries. These models also features a variable speed selector dial on the front of the unit for easy access.

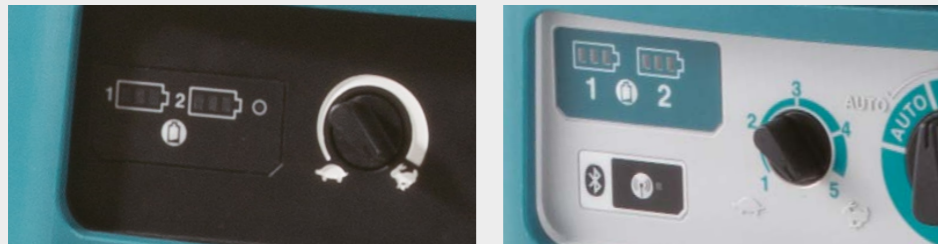

HEPA FILTER

Used as the main filter to capture fine particles. Able to capture 99.97% of particles.



ACCESSORY TRAY

The tray on the back is designed to hold all of your accessories. The tray can be removed if needed.



LOCKING WHEELS

Lock the wheels with the lever to stop the unit from moving if required.



LARGE ON/OFF SWITCH

The large on/off switch on top of the unit can be operated with the users foot.



SPECIFICATIONS	DVC151Z	DVC861LZ
Voltage	36V (18V X2) and 240V / 110V AC	36V (18V X2) and 240V / 110V AC
Brushless Motor	No	No
Sealed Suction	DC: 9 / AC: 24kPa	DC: 9 / AC: 24kPa
Air Volume	DC: 2.1 / AC: 3.6m ³ /min	DC: 2.1 / AC: 3.6m ³ /min
Speed settings	Variable suction power dial	Variable suction power dial
Suction Power	DC: 70 / AC: 320W	DC: 70 / AC: 320W
Filter	HEPA	HEPA
Weight	9.6 - 10.3kg	9.3 - 9.9kg
Capacity (Dry)	15L	8L
Run Time	5.0Ah: 65 mins	5.0Ah: 65 mins
Sound Pressure Level	75 dB(A)	75 dB(A)
LED Light	No	No
Warranty	1 Year + 2 Years Online	1 Year + 2 Years Online

STANDARD EQUIPMENT:

DVC151LZ: Floor nozzle, 2.5m x 38mm hose, 3.5m x 28mm hose, dust bag, straight pipe, bent pipe, crevice nozzle, tool box, front cuffs.
 DVC861LZ: Floor nozzle, 2.5m x 38mm hose, 3.5m x 28mm hose, dust bag, straight pipe, bent pipe, crevice nozzle, tool box, front cuffs.

ACCESSORIES

Floor T Nozzle 122512-4 (White)		Straight Pipe 192563-1		Tool Box Assembly 127607-8	
Floor T Nozzle 199455-5 (Black)		Hose 28mm x 3.5m 195433-3		Powder Filter 197166-6	
Sash Nozzle 410306-2 (White)		Hose 38mm x 2.5m 195434-1		Pre Filter (DVC157 - DVC867) 140253-0	
Bent Pipe 192562-3		Poly Bag (Pack of 10) 195432-5			

LXT 36V (18V X2) TUB VACUUM CLEANERS

DVC156L / DVC866L LXT 36V (18V X2) | Brushless Motor | Dry | L-CLASS



- 36V (18V x2)
- Dry Use Only



DVC155L / DVC865L LXT 36V (18V X2) | Brushless Motor | Wet & Dry | L-CLASS



- 36V (18V x2)
- Wet and Dry Use



BATTERY LAMP AND VARIABLE SPEED DIAL

A battery lamp display which allows the user to see the current charge for both 18V batteries. These models also features a variable speed selector dial on the front of the unit for easy access.



HEPA FILTER

Used as the main filter to capture fine particles. Able to capture 99.97% of particles.



ACCESSORY TRAY

The tray on the back is designed to hold all of your accessories. The tray can be removed if needed.



LOCKING WHEELS

Lock the wheels with the lever to stop the unit from moving if required.



LARGE ON/OFF SWITCH

The large on/off switch on top of the unit can be operated with the users foot.



SPECIFICATIONS	DVC156LZX1 - DVC866LZX1	DVC155LZX2 - DVC865LZX3
Voltage	36V (18V X2)	36V (18V X2)
Brushless Motor	Yes	Yes
Sealed Suction	11kPa	11kPa
Air Volume	2.1m ³ /min	2.1m ³ /min
Speed settings	5	5
Suction Power	105W	105W
Filter	HEPA	HEPA
Weight	DVC156L: 7.3-7.9 / DVC866L: 7.0-7.7kg	DVC155L: 7.2-7.9 / DVC865L: 7.0-7.7kg
Capacity (Dry)	DVC156L: 15 / DVC866L: 8L	DVC155L: 15/12L / DVC865L: 8/6L
Run Time	6.0Ah 100 mins	6.0Ah 100 mins
Sound Pressure Level	70 dB(A)	70 dB(A)
LED Light	No	No
Warranty	1 Year + 2 Years Online	1 Year + 2 Years Online

ACCESSORIES					
Floor T Nozzle 127082-8 (Black)		Hose 32mm x 1.7m 199493-7		Poly Bag (Pack of 10) 195432-5	
Floor T Nozzle 191G86-8 (White)		Aluminium Telescopic Pipe 140G19-0		Pre Filter (DVC155 - DVC865) 195553-3	
Sash Nozzle 198919-6 (White)		Tool Box Assembly 127622-2			

STANDARD EQUIPMENT:

DVC156LZX1 - DVC866LZX1: Poly bag set, 1.7m x 32mm hose, aluminium telescopic pipe, bending pipe, floor nozzle, crevice nozzle, Tool box.
 DVC155LZX2 - DVC865LZX3: Poly bag set, 1.7m x 32mm hose, aluminium telescopic pipe, bending pipe, F/C switching nozzle, crevice nozzle, Tool box.

For Cleaning *for Model DVC261, DVC265, DVC660, DVC665 only

Colour

with front sleeve

Hose connection 28

Hose connection 38

Hose connection 32

<p>Model</p> <p>VC001GL DVC156L VC002GL DVC860L VC003GL DVC157L VC004GL DVC861L VC005GL DVC865L VC1310L DVC866L DVC155L DVC867L</p>	<p>Model</p> <p>VC3211H VC3211M VC2211M VC2000L</p>	<p>Model</p> <p>VC008G VC009G DVC261 DVC660 DVC350</p>
--	--	---

<p>Hose 38mm with front sleeve (front cuffs 32A) 1.5m 199388-4</p>	<p>Hose 32mm with front sleeve (front cuffs 32A) 1.0m*199453-9 1.7m 199493-7</p>	<p>Hose 28mm 1.0m *143787-2 1.5m 152992-0 3.5m 195433-3</p>
---	---	--

<p>Bending pipe assembly with pipe lock without sleeve 140G26-3 (front cuffs 32A)</p>	<p>Bending pipe assembly with pipe lock with sleeve 127093-3</p>	<p>Bending pipe assembly without sleeve458184-2 (front cuffs 32A)</p>	<p>Bending pipe assembly with sleeve126756-8</p>
--	---	--	---

<p>Cyclone attachment set with pipe lock *</p> <p>○ 191D71-3 ● 191D73-9</p>	<p>Cyclone attachment set *</p> <p>○ 199491-1 ● 191D75-5</p>	<p>Aluminum joint pipe (L=465mm) 199844-4</p>
--	---	--

<p>Straight pipe with pipe lock Aluminum Telescopic pipe 28L (L=590-942mm) 140G19-0 Bending pipe assembly with pipe lock (140G26-3)</p>	<p>Straight pipe Plastic Telescopic pipe 28 (L=500-850mm) 198560-5</p>	<p>Aluminum straight pipe 32 (L=465mm) 199843-6</p>
--	---	--

<p>Plastic Telescopic pipe 28L (L=590-950mm)</p>	<p>Plastic straight pipe 28L with pipe lock (L=479mm) ● 459356-2 ● 458942-6</p>	<p>Plastic straight pipe 28L with pipe lock (L=340mm) for Cyclone attachment set ○ 191D76-3</p>
---	--	--

<p>28mm Tip attachments</p> <p>Nozzle assembly Flat type 127082-8</p>	<p>Seat nozzle 28 For automobile ○ 199038-1 ● 199041-2</p>	<p>Crevice nozzle 415 199439-3</p>
---	---	---

<p>F/C switching t-nozzle 28 Flooring & carpet 191G86-8</p>	<p>Seat nozzle 120 set For automobile 140H95-0</p>	<p>Oval brush ● 198552-4 ○ 198878-4 ● 198549-3</p>
--	---	---

<p>F/C switching t-nozzle 28 Flooring & carpet ○ 198532-0</p>	<p>Mat nozzle 120 For automobile 459056-4</p>	<p>Shelf brush ● 198537-0 ○ 198873-4 ● 198538-8</p>
--	--	--

<p>Nozzle assembly Floor t-nozzle 28 ● 123485-4 ○ 123486-2 ● 123488-8 ● 123539-7</p>	<p>Brush nozzle set 191M30-1</p>	<p>Soft brush 360 complete set 140H94-2</p>
---	---	--

<p>Floor/carpet t-nozzle For rug / carpet ○ 198149-9 ○ 198525-7 ● 198523-1</p>	<p>Sash nozzle ● 416041-0 ○ 451240-7 ○ 451243-1 ● 456586-6</p>	<p>Rubber nozzle 330 set *422437-5</p>
---	---	---

<p>Nozzle assembly For rug / carpet 122291-4</p>	<p>Long sash nozzle 330 ○ 198919-6 ● 198990-0 ● 191D65-8</p>	<p>Flexible rubber nozzle 28 *197901-2</p>
---	---	---

Cleaning set
-Hose complete 38-2.5
-Straight pipe
-Bending pipe
-Nozzle assembly
-Corner nozzle
195439-1

Hose 38mm
2.5m 195434-1
5m 195435-9

Bent pipe 192562-3
Straight pipe 192563-1

38mm Tip attachments

Nozzle assembly
Flat type (Dry)
199455-5

F/C switching t-nozzle
Flooring & carpet (Dry)
198184-7 / 198533-8

Universal type (Dry/ Wet)
195551-7

Compact type B (Wet model only)
122335-0

Wide Type (Wet model only)
A-47846

Round brush
191657-9

Corner nozzle
410306-2

Model
VC3012M
VC4210M

Hose 32mm
4m P-84084

Curved hand tube inox
P-70346

Extension tubes
ø35x350mm 3pcs
W107418350

Floor nozzle
D36x300(Dry/ Wet)
P-81789

Corner nozzle
ø35x300
W6084

Cleaning set
A, B, C, D set
W107418349

With pipe lock Model:

CL002G
CL001G
DCL280F
DCL281F
DCL282F
CL117FD

Model:

DCL180
DCL181F
DCL182
DCL281F
CL106D
CL108FD

Colour

Model:
DCL184, CL121D

Cyclone attachment set with pipe lock

○ 191D71-3
● 191D73-9

Flexible hose set
191E30-3

Cyclone attachment set

○ 199491-1
● 191D75-5

*Included sensomatic

Blower nozzle complete
140J64-3

Straight pipe with pipe lock

Plastic straight pipe 28L with pipe lock (L=479mm)
○ 459353-8
● 459356-2
● 458942-6

Plastic straight pipe 28L with pipe lock (L=340mm) for Cyclone attachment set
○ 191D76-3
● 191D77-1

Straight pipe
Plastic Telescopic pipe 28 (L=500-850mm)
○ 198560-5

Plastic straight pipe 28 (L=465mm)
● 451424-7
○ 451241-5
● 451244-9
● 456587-4

Plastic straight pipe 28 (L=320mm) for Cyclone attachment set
○ 191D79-7
● 191D80-2

Flexible hose set
● 191496-7 / 198544-3
○ 198867-9 / 198868-7
● 198541-9
● 198547-7

Flexible rubber nozzle 28
197901-2

28mm Tip attachments

F/C switching t-nozzle 28
Flooring & carpet
191G86-8

Seat nozzle 28
For automobile
○ 199038-1
● 199041-2

Crevice nozzle 415
199439-3

Rubber nozzle 330 set
*422437-5

*These nozzles cannot be attached directly to Bending pipe assembly use with telescopic pipes or straight pipes.

F/C switching t-nozzle 28
Flooring & carpet
○ 198532-0

Seat nozzle 120 set
For automobile
140H95-0

Oval brush
● 198552-4
○ 198878-4
● 198549-3

Holder set Part No. 199971-7
Model: CL001G, CL002G, DCL280F, DCL281F, DCL282F, DCL180, DCL180F, DCL181F, DCL182, DCL182F, CL114FD, CL107FD, CL072D

Nozzle assembly
Floor t-nozzle 28
● 123485-4
○ 123486-2
● 123488-8
● 123539-7

Mat nozzle 120
For automobile
459056-4

Shelf brush
● 198537-0
○ 198873-4
● 198538-8

Sash nozzle holder 28
○ 451242-3
● 451245-7

Floor/carpet t-nozzle
For rug / carpet
○ 198149-9
○ 198525-7
● 198523-1

Sash nozzle
● 416041-0
○ 451240-7
○ 451243-1
● 456586-6

Soft brush 360 complete set
140H94-2

Plastic straight pipe
Sash nozzle holder 28
Sash nozzle

Nozzle assembly
For rug / carpet
122291-4

Long sash nozzle 330
○ 198919-6
● 191D65-8

Floor nozzle
D36x260 (Dry/ Wet)
W107402706

Floor nozzle
Universal Type(Wet)
W14295

Corner nozzle
ø35x200
Use with P-81745
W29541

Cleaning set
A, B, C, D set
W107418349

Holder set Part No. 199971-7
Model: CL001G, CL002G, DCL280F, DCL281F, DCL282F, DCL180, DCL180F, DCL181F, DCL182, DCL182F, CL114FD, CL107FD, CL072D

Sash nozzle holder 28
○ 451242-3
● 451245-7

GROUNDS MAINTENANCE EQUIPMENT

MAKITAUK.COM/LANDSCAPING



XGT 40V BLOWER

UB001G XGT 40V | BL Motor



STANDARD EQUIPMENT:

Nozzle Assembly, Shoulder Strap

SPECIFICATIONS	UB001G
Voltage	40V
Brushless Motor	Yes
No Load Speed	0 - 23,000rpm
Max Air Volume	16m ³ /min
Max Air Velocity	64 m/s
Weight	3.1 - 3.9kg
Warranty	1 Year + 2 Years Online

LXT 18V AND 36V (18V X2) BLOWERS

DUB184 LXT 18V | BL Motor



STANDARD EQUIPMENT:

Shoulder belt, nozzle, hex wrench

SPECIFICATIONS	DUB184Z
Voltage	18V
Brushless Motor	Yes
No Load Speed	0 - 18,000rpm
Max Air Volume	13.0m ³ /min
Max Air Velocity	52.1m/s
Weight	2.5 - 3.0kg
Warranty	1 Year + 2 Years Online

DUB186 LXT 18V | BL Motor



STANDARD EQUIPMENT:

Garden nozzle

SPECIFICATIONS	DUB186Z
Voltage	18V
Brushless Motor	No
No Load Speed	0 - 18,000rpm
Max Air Volume	3.2m ³ /min
Max Air Velocity	68m/s
Weight	1.6 - 2.1kg
Run Time	6.0Ah: 24 - 160 mins
Warranty	1 Year + 2 Years Online



VACUUM ATTACHMENT

The DUB363 can be converted into vacuum using the kit provided as standard. Kit includes a 2 piece nozzle, collection bag and shoulder strap. The machines inlet also has a mulching blade for larger leaves and garden debris.

DUB363 LXT 36V (18V X2) | BL Motor



STANDARD EQUIPMENT:

Vacuum kit, Flat Nozzle, End Nozzle, Pipe, Shoulder Belt, Hex Wrench

SPECIFICATIONS	DUB363ZV
Voltage	36V (18V X2)
Brushless Motor	Yes
No Load Speed	0 - 7,850rpm
Max Air Volume	13.4m ³ /min
Max Air Velocity	65 m/s
Weight	4.5 - 6.6kg
Warranty	1 Year + 2 Years Online

DUB362 LXT 36V (18V X2) | BL Motor



STANDARD EQUIPMENT:

Long nozzle, shoulder strap

SPECIFICATIONS	DUB362Z
Voltage	36V (18V X2)
Brushless Motor	Yes
No Load Speed	11,400 - 21,500rpm
Max Air Volume	6.9 - 13.4m ³ /min
Max Air Velocity	27 - 54 m/s
Weight	3.5 - 4.2kg
Run Time	5.0Ah: 11 - 73 mins
Warranty	1 Year + 2 Years Online



XGT 40V SPLIT SHAFT

UX01G XGT 40V | BL Motor | AFT **XGT**



STANDARD EQUIPMENT:


Shoulder strap, hex wrench, safety goggles, accessory bag.

SPECIFICATIONS	UX01G
Voltage	40V
Brushless Motor	Yes
No Load Speed	High: 0-9,700 / Mid: 0-8,200 / Low: 0-5,700
Wattage	1000W
Weight	4.2 - 12.6kg
Warranty	1 Year + 2 Years Online

LXT 36V (18V X2) AND 18V SPLIT SHAFTS

DUX60 LXT 36V (18V X2) | BL Motor | AFT

DUX18 LXT 18V | BL Motor | AFT

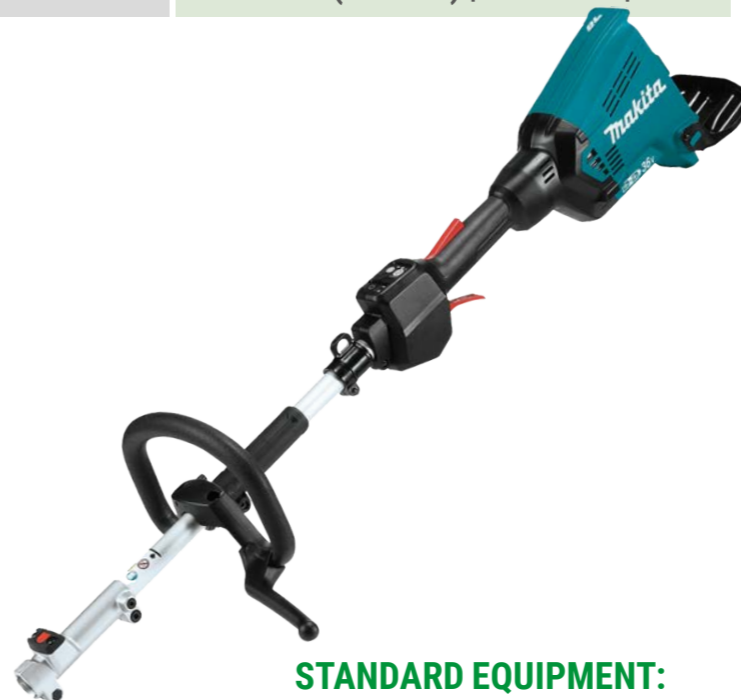

STANDARD EQUIPMENT:

Shoulder strap, hex wrench, safety goggles, accessory bag.

SPECIFICATIONS	DUX60Z
Voltage	36V (18V X2)
Brushless Motor	Yes
No Load Speed	High: 0-9,700 / Mid: 0-8,200 / Low: 0-5,700
Wattage	600W
Weight	4.1 - 8.7kg
Warranty	1 Year + 2 Years Online



STANDARD EQUIPMENT:

Shoulder strap, hex wrench, accessory bag.

SPECIFICATIONS	DUX18Z
Voltage	18V
Brushless Motor	Yes
No Load Speed	High: 0 - 9,700 / Low: 0 - 6,800rpm
Wattage	470W
Weight	2.8 - 10.3kg
Warranty	1 Year + 2 Years Online

SPEED CONTROL

3-speed options (up to 9,700 rpm) allows the operator to match speed to application.




SPLIT SHAFT SYSTEM

Lever style lock system allows for quick tool-less installation and replacement of attachments.



TORQUE CONTROL

Electronic torque control turns the motor off if rotation speed suddenly slows down or stops

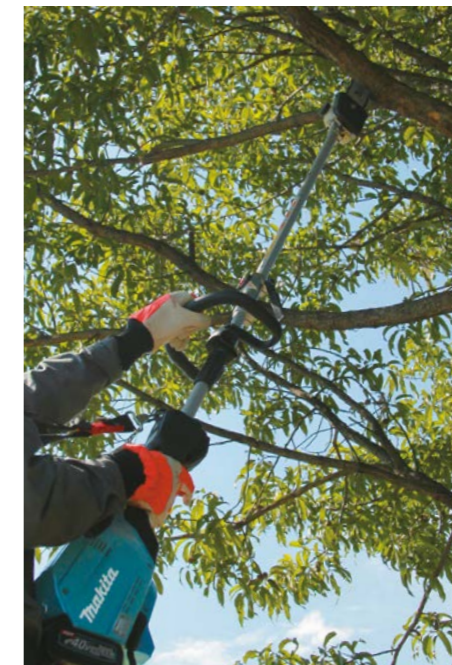






SPLIT SHAFT ATTACHMENTS

Brush Cutter 198768-1 / EM404MP 191N31-5 / EM408MP 	Linetrimmer 198779-6 / EM406MP 191N49-6 / EM409MP 	Scissors 191M56-3 / EM407MP 	Cultivator 195711-1 / KR400P 	Water Pump DEAPF400MP 
---	---	--	--	--



WATER PUMP ATTACHMENT

- Can be used pumping water, draining or sprinkling at work sites including irrigation and construction.
- Lowest water level for starting operation: 15mm; water can be pumped up until level is below 10mm.
- Max flow rate 150L/min when using with UX01G.
- Upward discharge port, minimising the chance of bending the hose in tight places.

Hedge Trimmer 196256-2 / EN401MP 	Pole Saw 199927-0 / EY401MP 	Edging Tool 196752-0 / EE400MP 	Power Brush 199318-5 / BR400MP 	
---	---	--	---	--

LXT 36V LINETRIMMER

UR201C | LXT 36V | BL Motor | AFT

SPECIFICATIONS	UR201C
Voltage	36V
Brushless Motor	Yes
No Load Speed	4600 / 5500 / 7000 rpm
Wattage	1000W
Speed Settings	3 speed + ADT mode
Weight	4.7 kg
Warranty	1 Year + 2 Years Online



STANDARD EQUIPMENT:
 Harness, Metal 2-tooth blade, Plastic blade, Nylon cutting head, Blade guard, Box wrench, hex wrench, accessory bag.

Extension Pole 191E24-8 / LE400MP 	Blower 191F65-0 / UB400MP 	Blower 191P72-3 / UB401MP Equipped with a silencer to maintain a low noise level. 	Sweeper 199339-7 / SW400MP 	
---	--	---	--	---

COMPATIBILITY INFORMATION:
 191F65-0 is not compatible with DUX60 machines with serial number lower than 85630 and ending in 'Y'
 198768-1 and 198779-6 are not compatible with the DUX18

UR101C & UR201C WITH BACKPACK POWER SUPPLY



PDC1200

With integrated battery cells



ⓐ 33.5Ah ⚡ 1,206Wh 🔌 1.1m

PDC01

Use with 4x 18V batteries



ⓐ 12 - 24Ah ⚡ 432Wh 🔌 1.7m



Direct Connection



191N62-4



191J51-5



191J50-7



PDC1200

Portable Power Supply Backpack

PDC1200A01
1,200Wh Battery power pack
Includes DC4001 Charger and Twin 18V adaptor.

PDC1200A02
1,200Wh Battery power pack
Includes DC4001 Charger.

1,200Wh (33.5Ah)
6 Hour charge time



191J51-5

191N62-4

PDC01

Portable Power Supply

191A64-2
PDC01 Portable Power Supply
Includes Twin 18V adaptor.
BATTERIES NOT INCLUDED

191A59-5
PDC01 Portable Power Supply
Includes 18V and Twin 18V adaptors.
BATTERIES NOT INCLUDED

191C91-1
PDC01 Portable Power Kit
Includes 4x Batteries, charger
and Twin 18V adaptor

Weights 7kg when holding 4 batteries.



191J51-5

191J50-7

DC4001

PDC1200 Charger

Charger for the PDC1200 portable power supply battery.



191E43-4

Protection Harness

Brushcutter Protection harness for the PDC01 and PDC1200.



LXT 36V (18V X2) POWER WASHER

DHW080ZK LXT 36V (18V X2) | BRUSHLESS MOTOR



WATER SUPPLY

The DHW080 can be ran from a mains water supply or from a water tank (50L Tank supplied).



HI AND LOW PRESSURE

The DHW080 has two pressures (Hi and Low) so the user can choose the correct option relevant to the intended application.



MAKPAC

The 50L tank is part of the Makpac system allowing cases to fit on top and connecting to the TR00000001 Makpac trolley.



ON-BOARD ACCESSORIES

Attachments, hoses and accessories can be stored on-board the DHW080 for transport or for ease of access while the user works.



STORAGE OPTIONS

The 50L tank can be used as a storage container for the DHW080 and accessories.



SPECIFICATIONS	DHW080ZK
Pump Speed	Hi: 3,450 / Low: 2,390rpm
Regular Pressure	Hi: 55 / Low: 30 Bar
Max Permissible Pressure	80 bar
Regular Flow Pressure	Hi: 330 l/hour / Low: 240 l/hour
Max Water Flow	380 l/hour
Max Water Feed Temperature	40°C
Tank Capacity	50L
Weight	6.4 - 7.7kg
Run time	6.0Ah 34 mins
Sound Pressure Level	70.9 dB(A)
Warranty	1 Year + 2 Years Online

- Stepless pressure adjustment close at hand: Jet pressure can be adjusted simply by turning the nozzle
- High/Low 2-pressure selection
- Self-priming function (with a max suction height of 1m) - Water can be supplied not only from a faucet but also from a tank or bucket using self-suction hose set
- Storage space for attachment
- Hook for shoulder belt
- Wet Guard: Excellent water-resistant performance allows to operate the machine even when it is wet with water as long as the battery cover is closed

STANDARD EQUIPMENT:

Trigger gun, variable spray lance, cyclone jet nozzle, self-suction hose set, high pressure hose 5m, storage box, connector set

ACCESSORIES

Hoses 10m: 197837-5 15m: 197840-6		Vario Spray Lance 197876-5		Cyclone Guard Assembly 197864-2		Accessory Joint 197853-7	
High Pressure Hose 5m: 197845-6 8m: 197847-2 10m: 197850-3 PVC 10m: 126766-5		Variable Nozzle 197822-8		Wash Brush 197828-6		Extension Pipe 197870-7	
Trigger Gun Assembly 197842-2		Rotating Brush 197831-7		Foam Nozzle 197886-2		Threaded Tap Connector With Filter 197881-2	
Cyclone Jet Nozzle 197824-4		Under Body Spray Lance 198909-9		One Touch Tap Connector 197883-8		Anti-Twist Joint Assembly 197867-6	

MAINS POWER WASHERS

HW140 240V | AQUA MAK



SPECIFICATIONS	HW140
Max Pressure	140 Bar
Max Flow	500L/hr
Hose Length	10m
Piston Material	INOX
Motor Casing	Aluminium
Mechanical System	Wobble plate
Input Power	2.3kW
Motor Type	Induction
Weight	26.2kg
Sound Pressure Level	82.68 dB(A)
Warranty	1 Year + 2 Years Online

STANDARD EQUIPMENT:

10m high pressure soft hose, gun with safety catch, adjustable spray nozzle, rotating nozzle kit, nozzle cleaning tool, male and female adaptors.

HW1200 240V



SPECIFICATIONS	HW1200
Max Pressure	120 Bar
Max Flow	420L/hr
Hose Length	10m
Input Power	1.8kW
Motor Type	Series
Weight	11kg
Sound Pressure Level	72 dB(A)
Warranty	1 Year + 2 Years Online

STANDARD EQUIPMENT:

Trigger gun, Vario-Power Spray Lance, Cyclone jet nozzle, Detergent bottle, Cleaner Pin, Coupling Sleeve, 10m high pressure soft hose, Water hose connector, Foam nozzle, Connector.

HW1300 240V



SPECIFICATIONS	HW1300
Max Pressure	130 Bar
Max Flow	450L/hr
Hose Length	10m
Input Power	1.8kW
Motor Type	Series
Weight	12.7kg
Sound Pressure Level	76 dB(A)
Warranty	1 Year + 2 Years Online

STANDARD EQUIPMENT:

Trigger gun, Vario-Power Spray Lance, Cyclone jet nozzle, Detergent bottle, Cleaner Pin, Coupling Sleeve, 10m high pressure soft hose, Water hose connector, Foam nozzle, Connector.



Makita[®]



MAKITAUK.COM

*Accessories shown are not necessarily supplied as standard equipment.
Prices and specification shown may change owing to our policy of constant improvement.
Subject to availability. E&OE.*

98N398 0323